Ref. No. 4090
Aug, 2008

Integra SERVICE MANUAL

STEREO RECEIVER
MODEL DTM-5.9

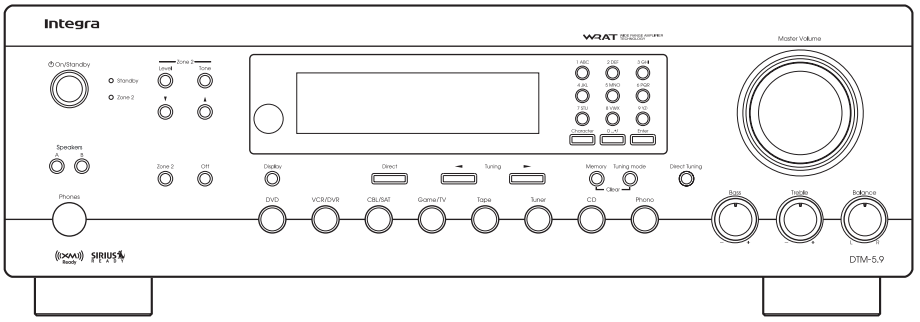

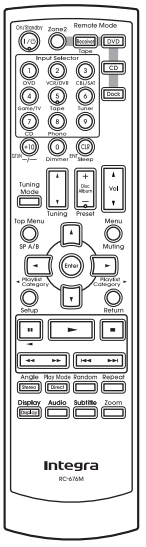

RC-676M

Black model

B MDD	120V AC, 60Hz

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK ⚠ ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

EXPLODED VIEW

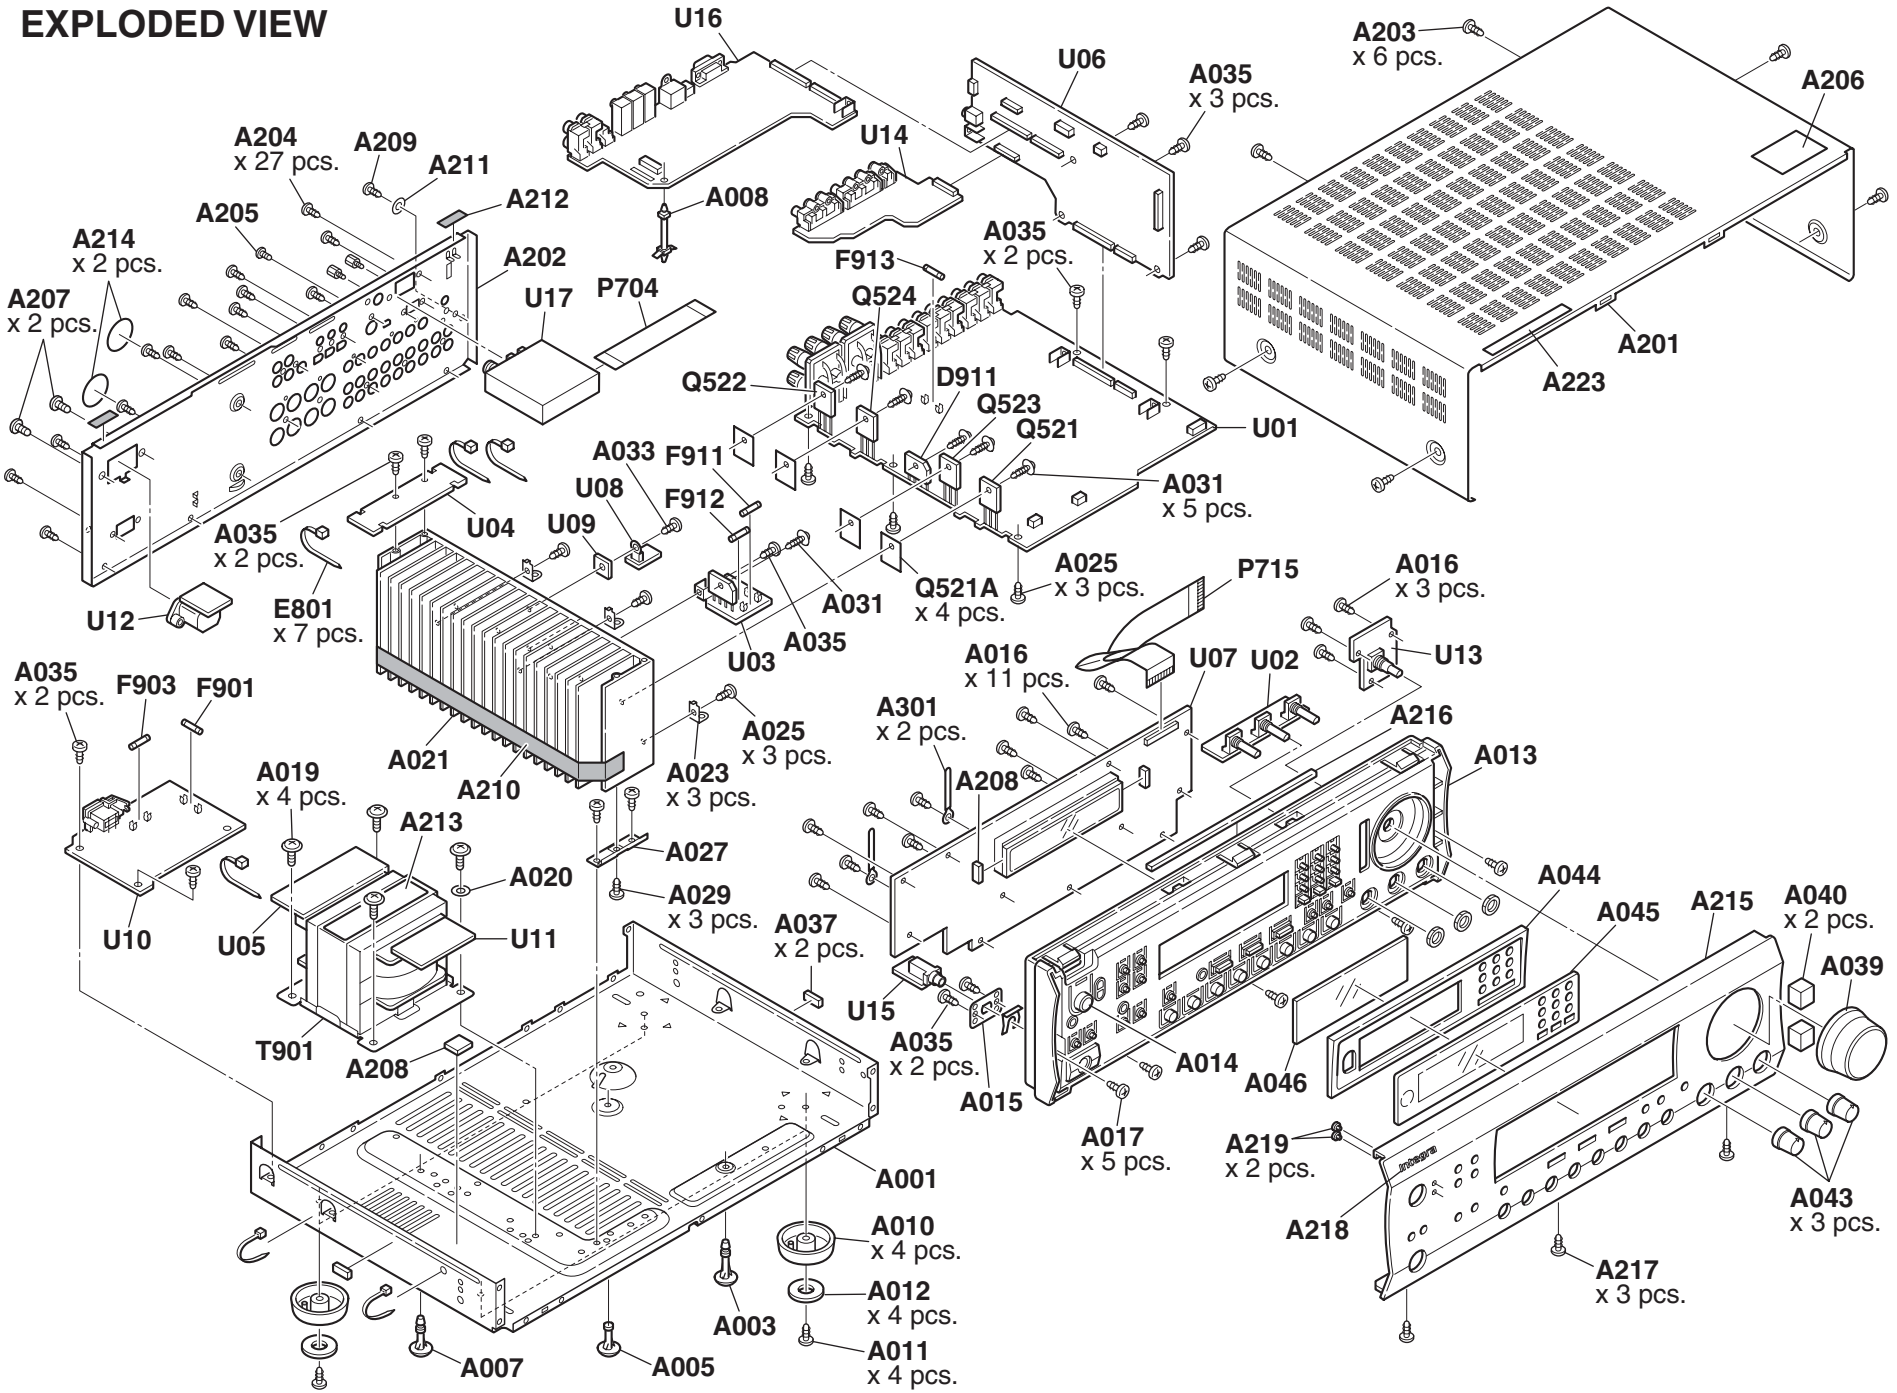

DTM-5.9

BLOCK DIAGRAM

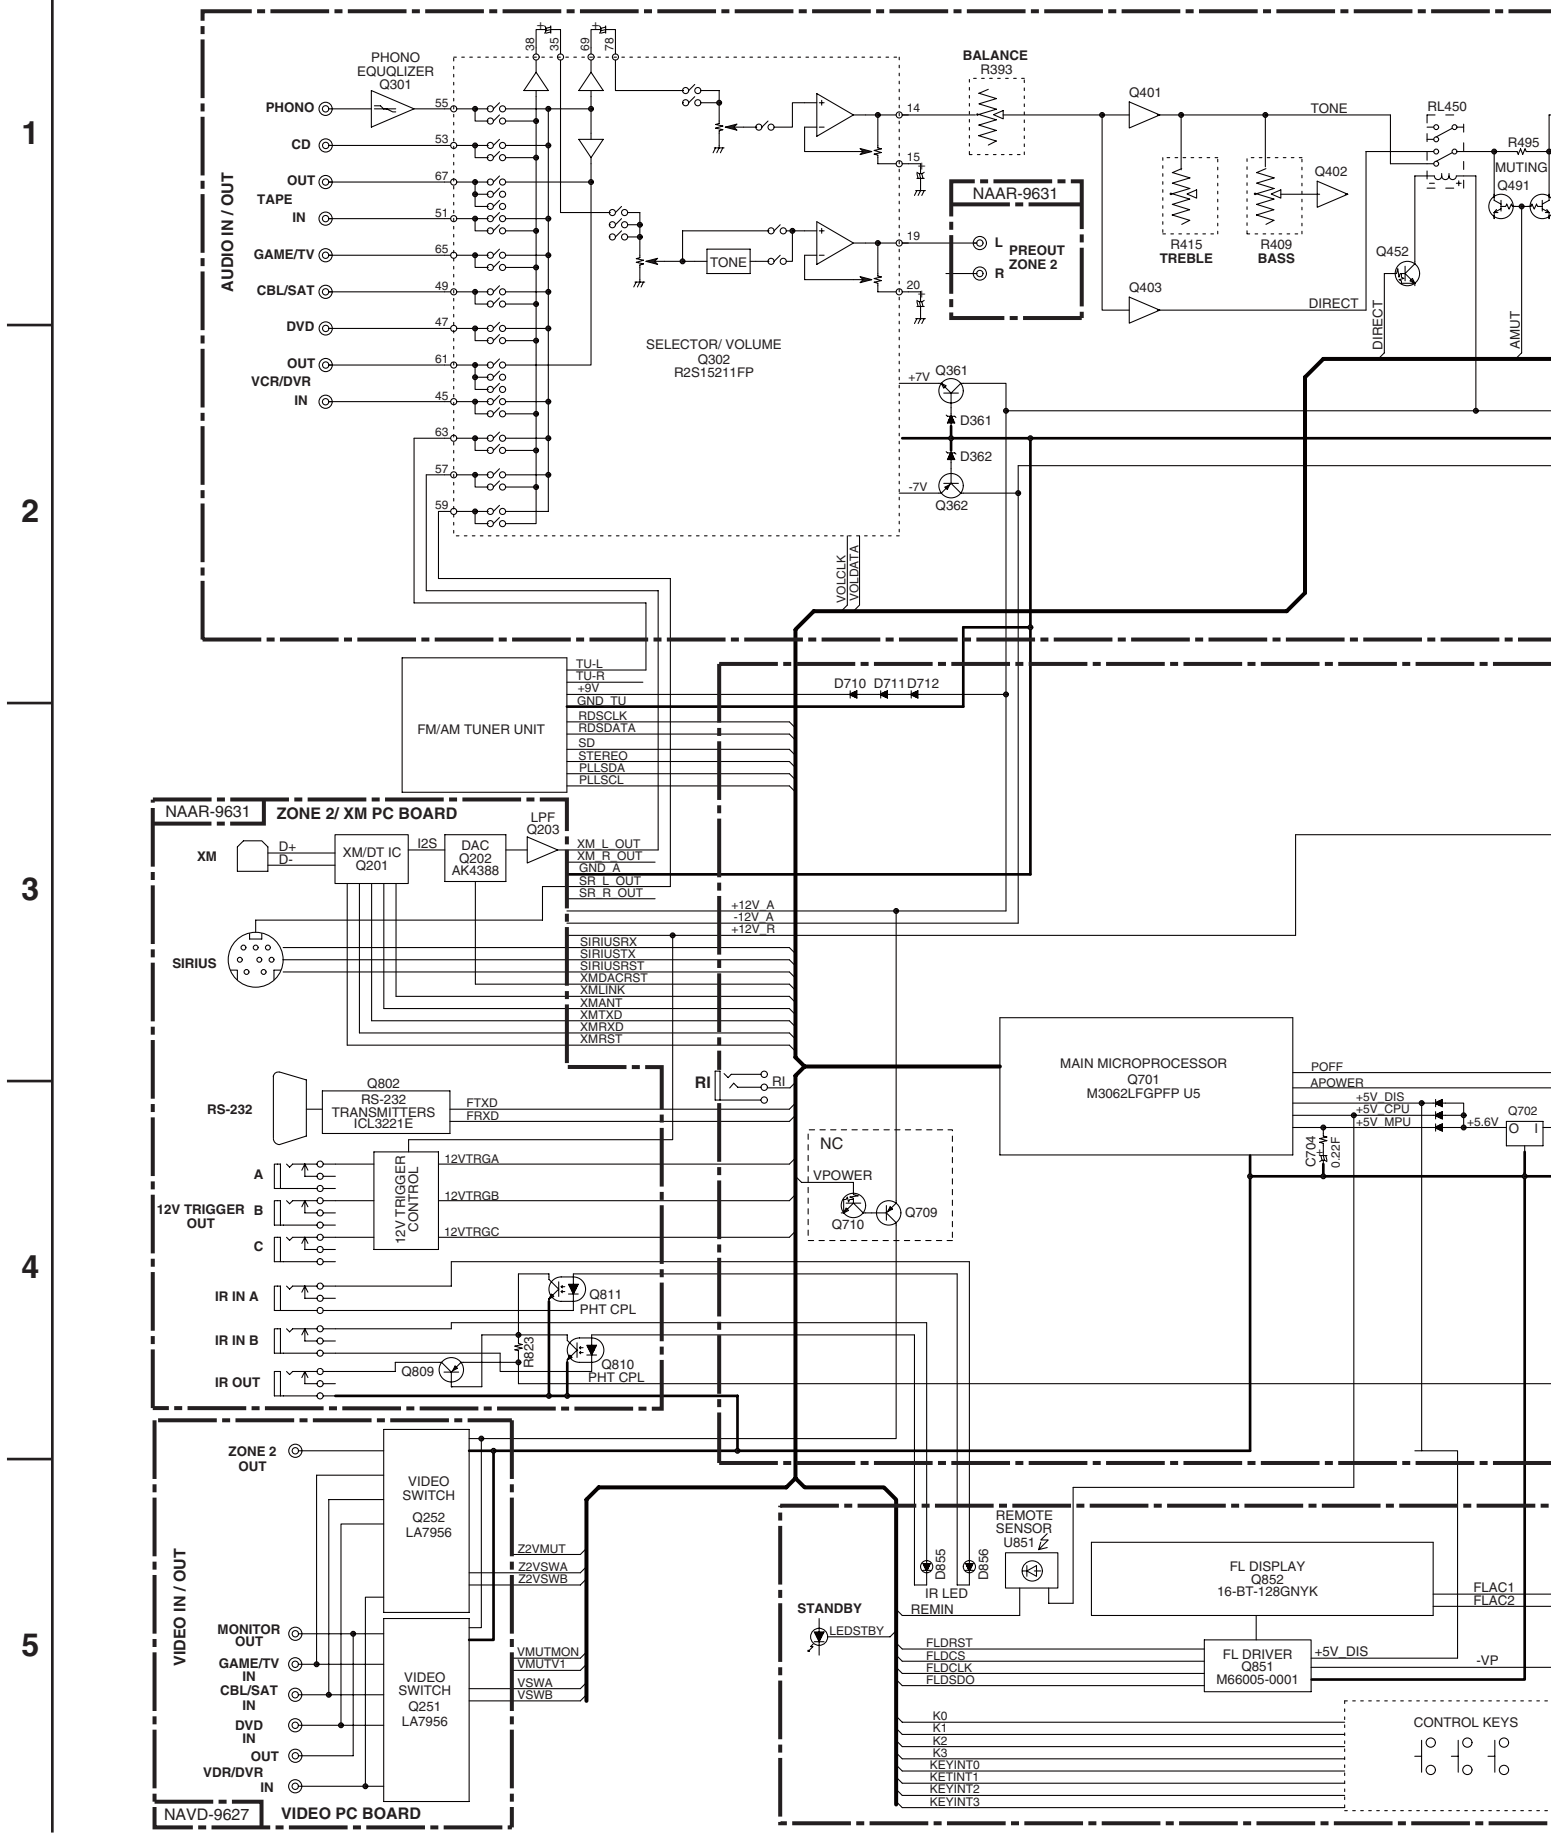

E F G H

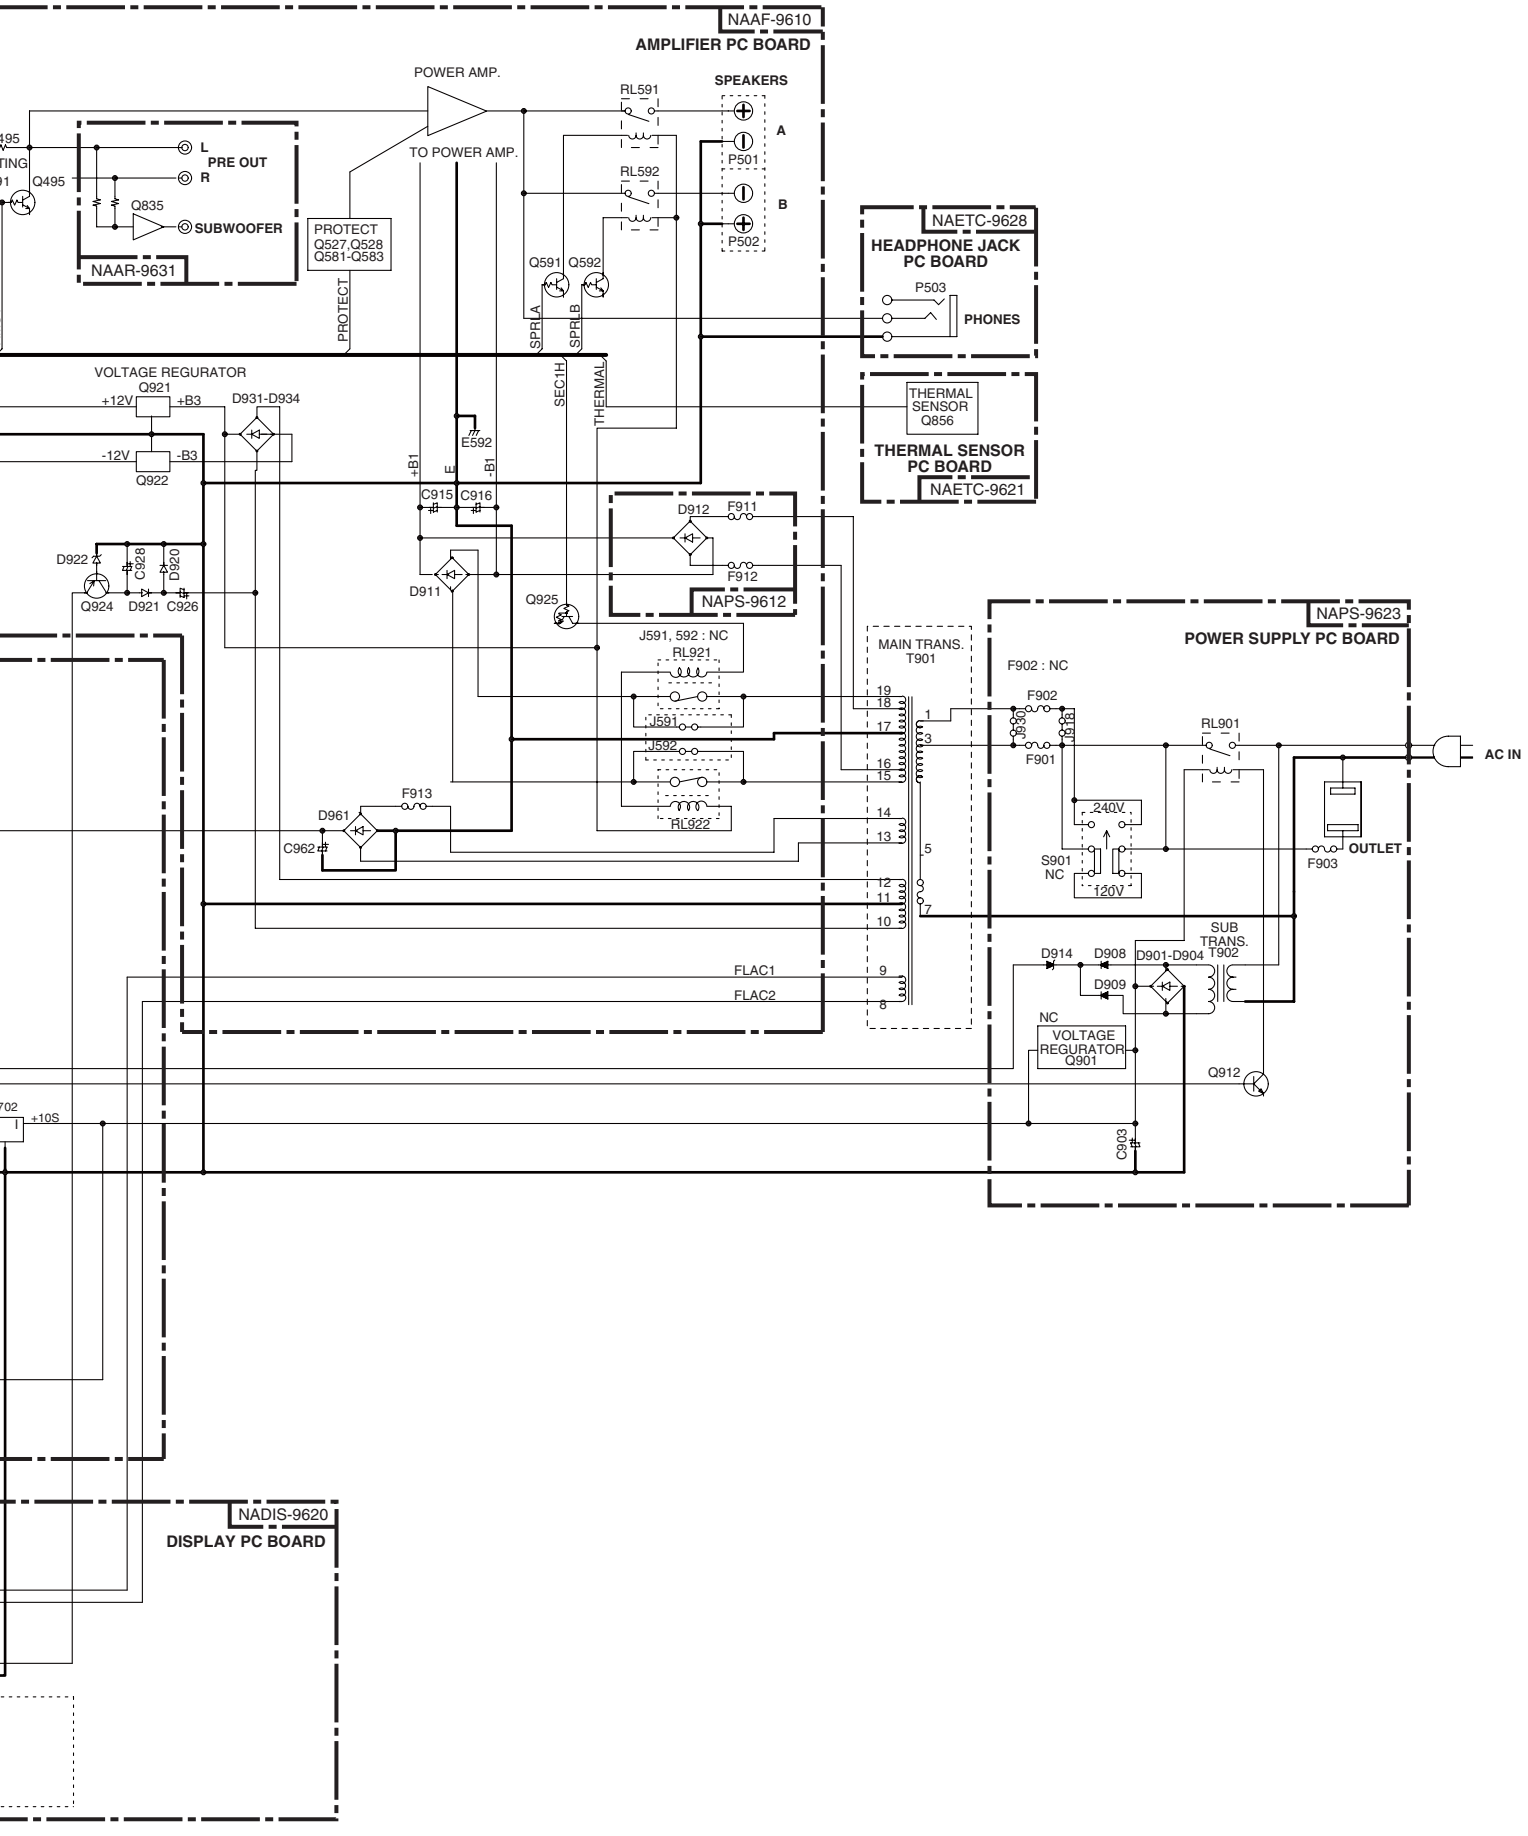
NAAF-9610
AMPLIFIER PC BOARD
POWER AMP.
TO POWER AMP.
SPEAKERS
RL591
RL592
A
B
P501
P502
L
R
PRE OUT
Q495
Q835
SUBWOOFER
NAAR-9631
PROTECT
Q527,Q528
Q581-Q583
PROTECT
Q591 Q592
SPRLA
SPRLB
NAETC-9628
HEADPHONE JACK
PC BOARD
P503
PHONES
VOLTAGE REGURATOR
Q921
+12V
+B3
D931-D934
-12V
-B3
Q922
SEC1H
THERMAL
THERMAL
SENSOR
Q856
THERMAL SENSOR
PC BOARD
NAETC-9621
+B1
E592
B1
C915 C916
D912
F911
F912
NAPS-9612
D922
C928
D920
Q924
D921
C926
D911
Q925
J591, 592 : NC
RL921
J591
J592
RL922
MAIN TRANS.
T901
19
18
17
16
15
14
13
12
11
10
9
8
1
3
5
7
F913
D961
C962
FLAC1
FLAC2
NAPS-9623
POWER SUPPLY PC BOARD
F902 : NC
F902
F901
RL901
AC IN
240V
120V
S901
NC
F903
OUTLET
SUB
TRANS.
T902
D914
D908
D901-D904
D909
NC
VOLTAGE
REGURATOR
Q901
Q912
C903
+10S
NADIS-9620
DISPLAY PC BOARD

SCHEMATIC DIAGRAMS-1(SD-1)

NAAF-9610

AMPLIFIER SECTION

U01 AMPLIFIER PC BOARD

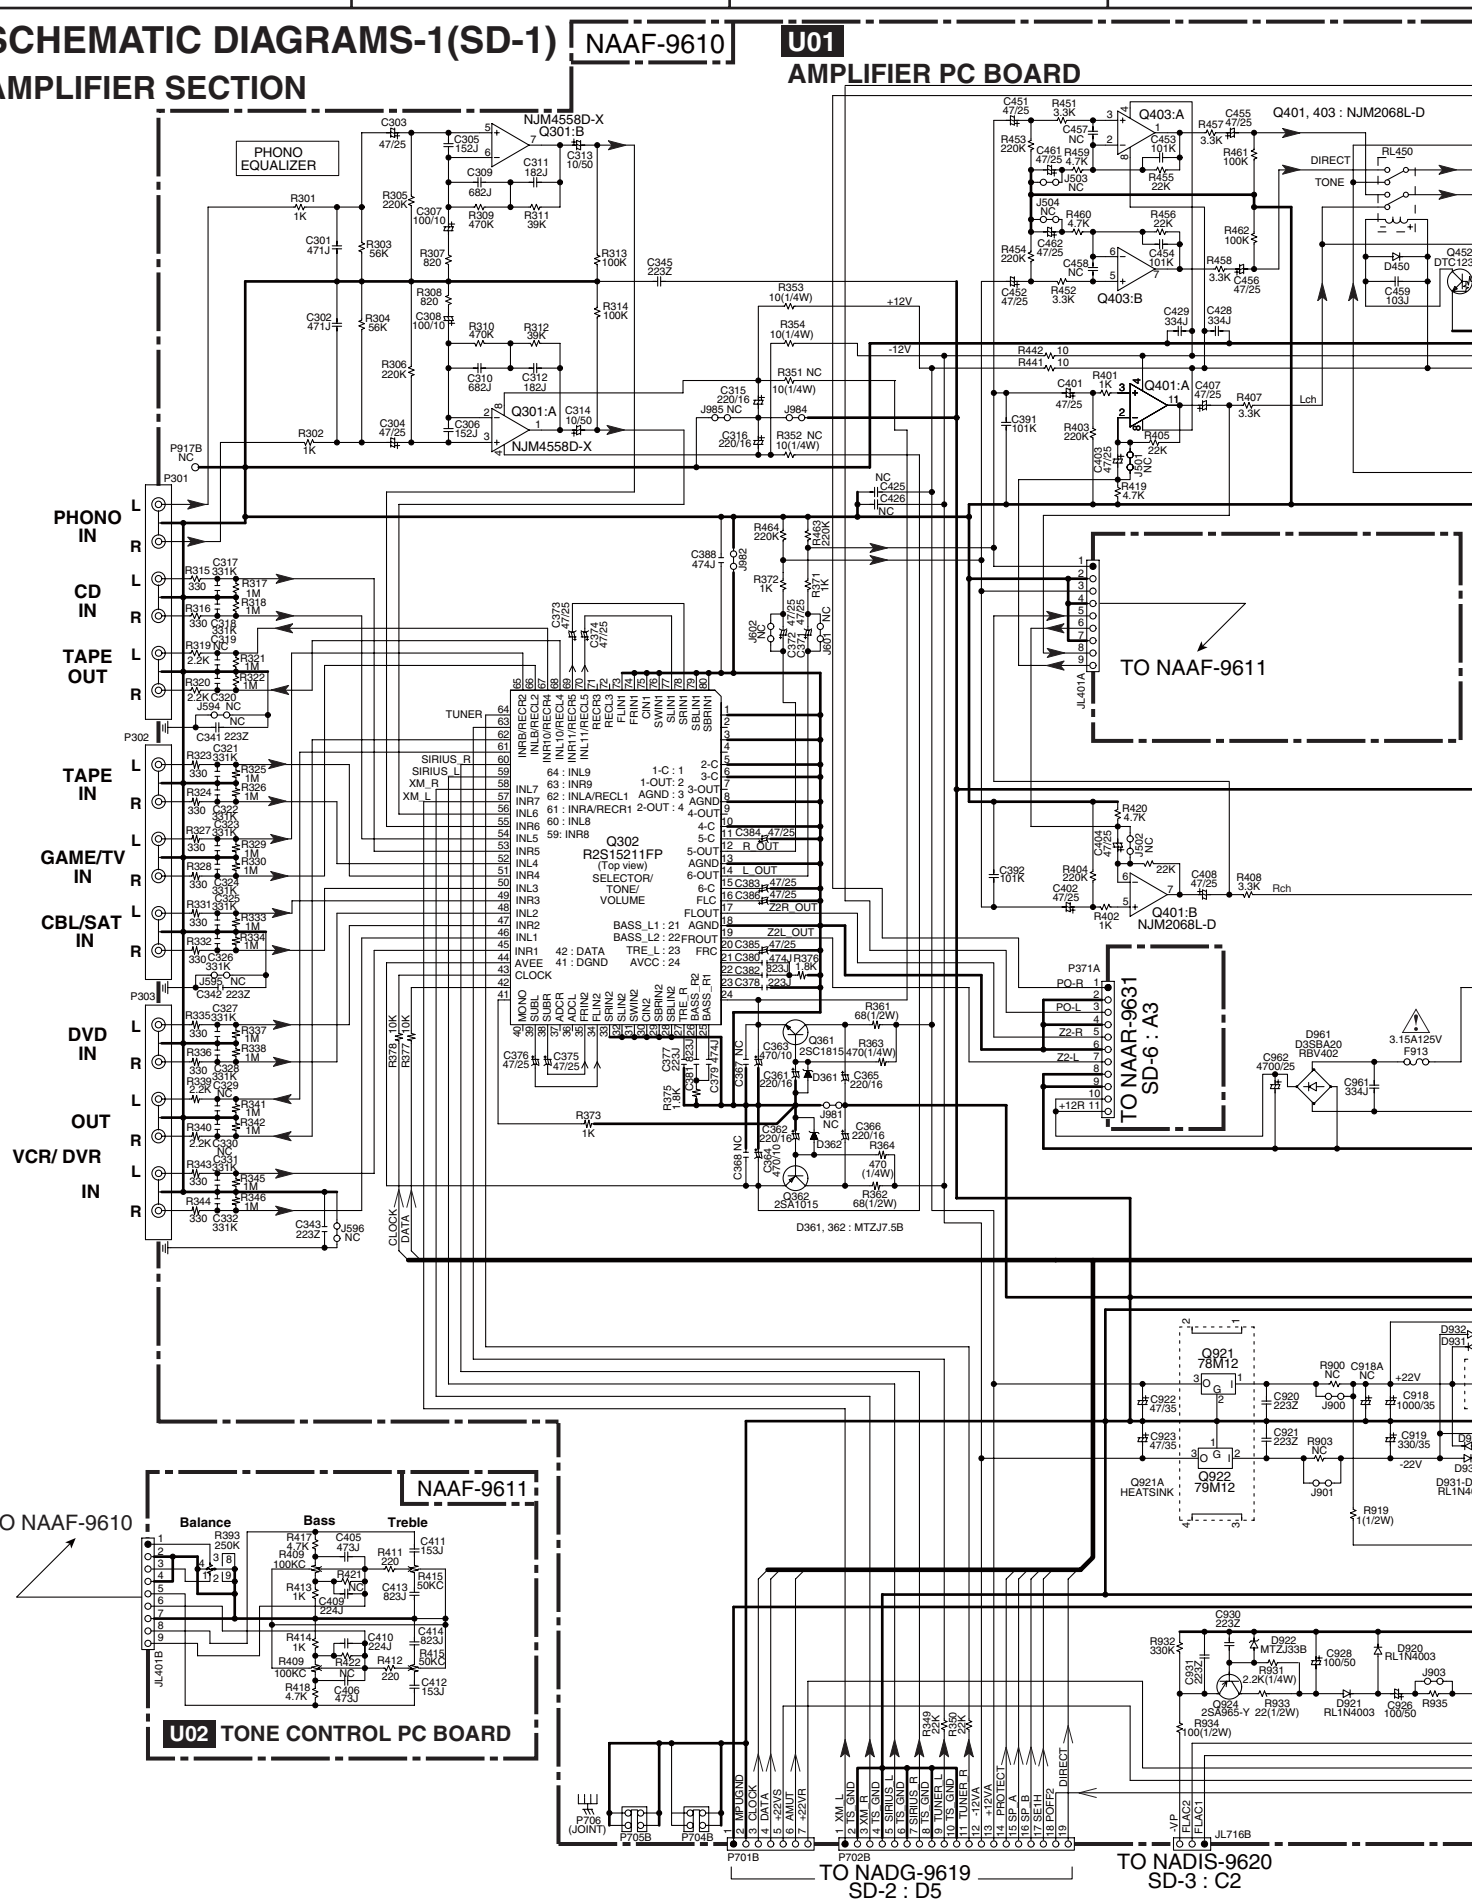

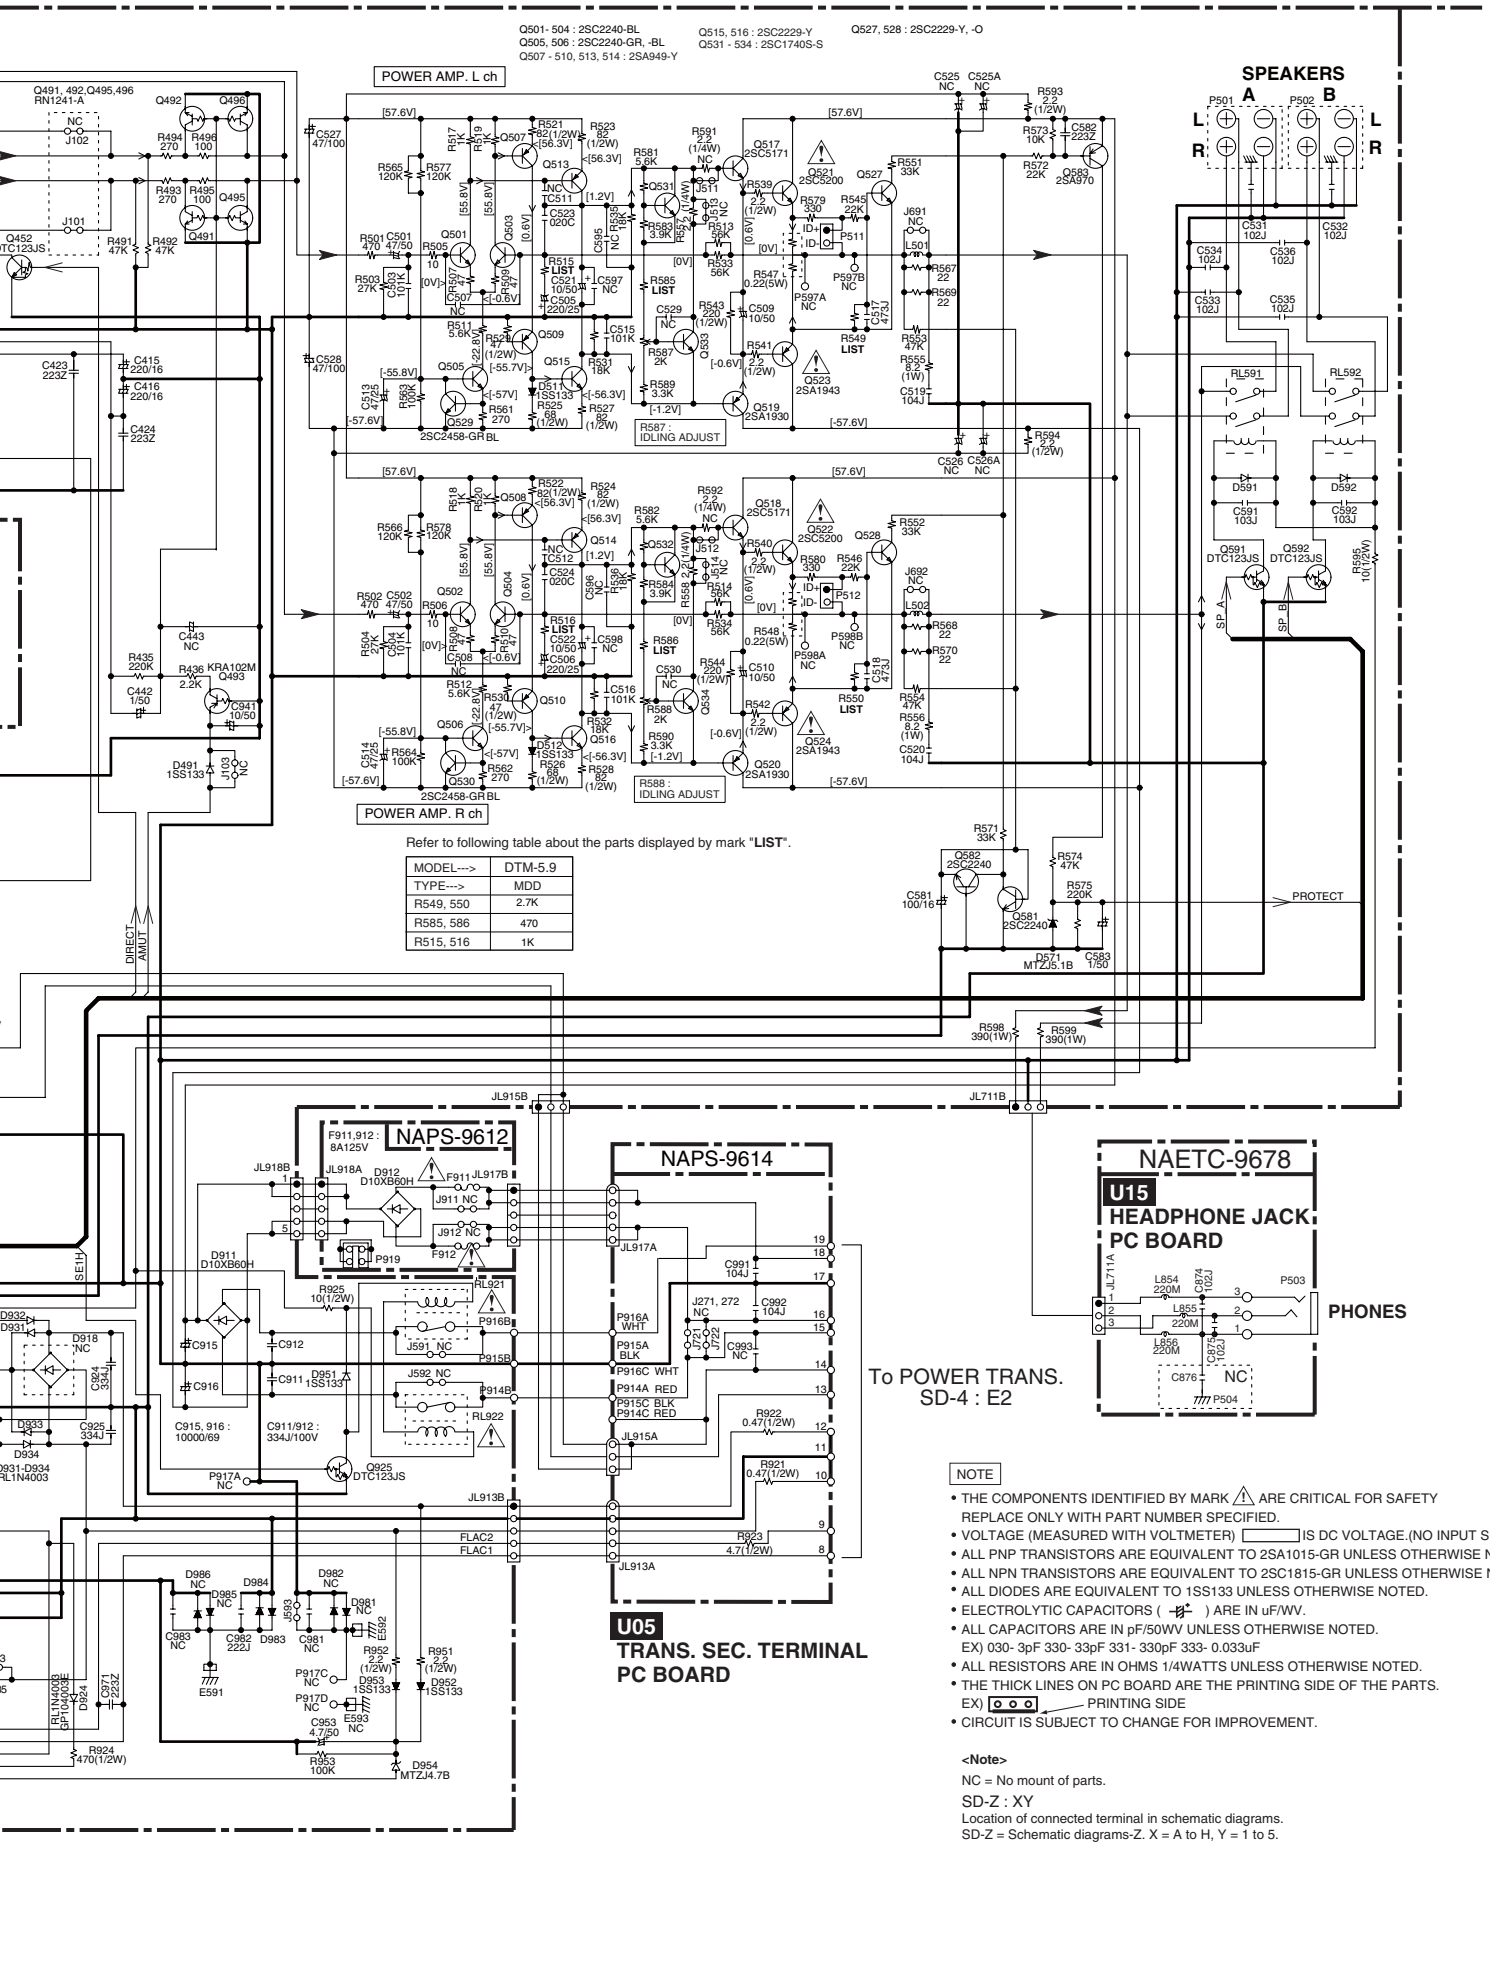

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) [ ] IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (⊣⊢) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. EX) ⊙⊙⊙ PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>

NC = No mount of parts.

SD-Z : XY

Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

SCHEMATIC DIAGRAMS-2(SD-2)

MICROPROCESSOR SECTION

NADG-9619 **U06**

MICROPROOCESSOR PC BOARD

Refer to following table about the parts displayed by mark "**LIST**".

TYPE --->	MDD
R754	0
R755	0
R756	0
R757	0
R758	NC
R759	NC
R760	NC
R761	NC

TO NAAR-9631 SD-6 : A2

TO TUNER UNIT

TO NAAR-9631 SD-7 : E3

MDD Type only

TO NAPS-9623 SD-4 : C4

TO NAAF-9610 SD-1 : C5

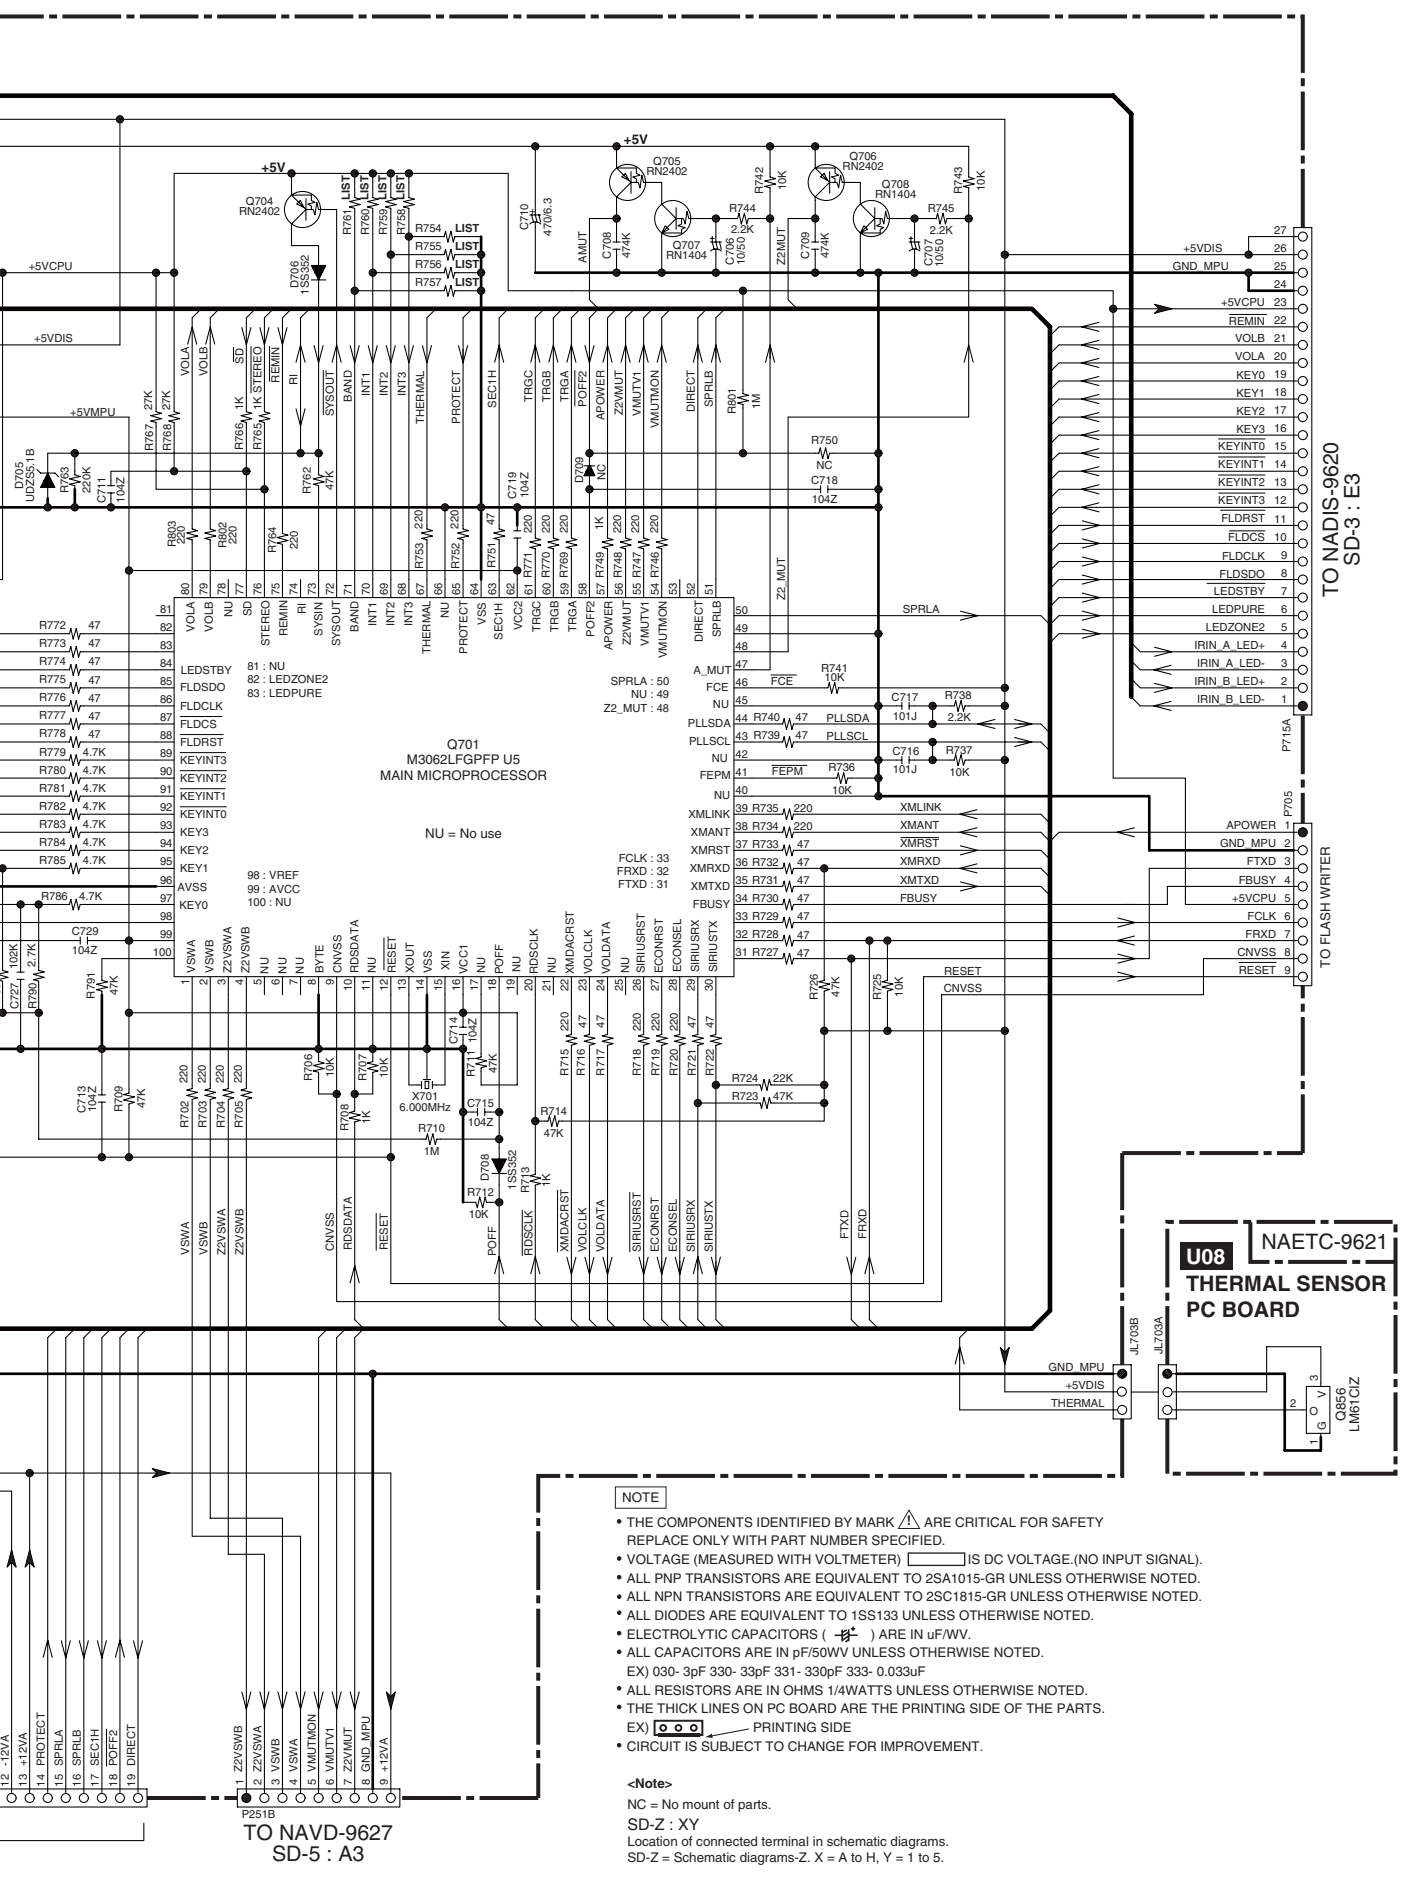

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) [ ] IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (⊣⊢) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
  EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
  EX) [o o o] PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>

NC = No mount of parts.

SD-Z : XY

Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

SCHEMATIC DIAGRAMS-3(SD-3)

DISPLAY SECTION

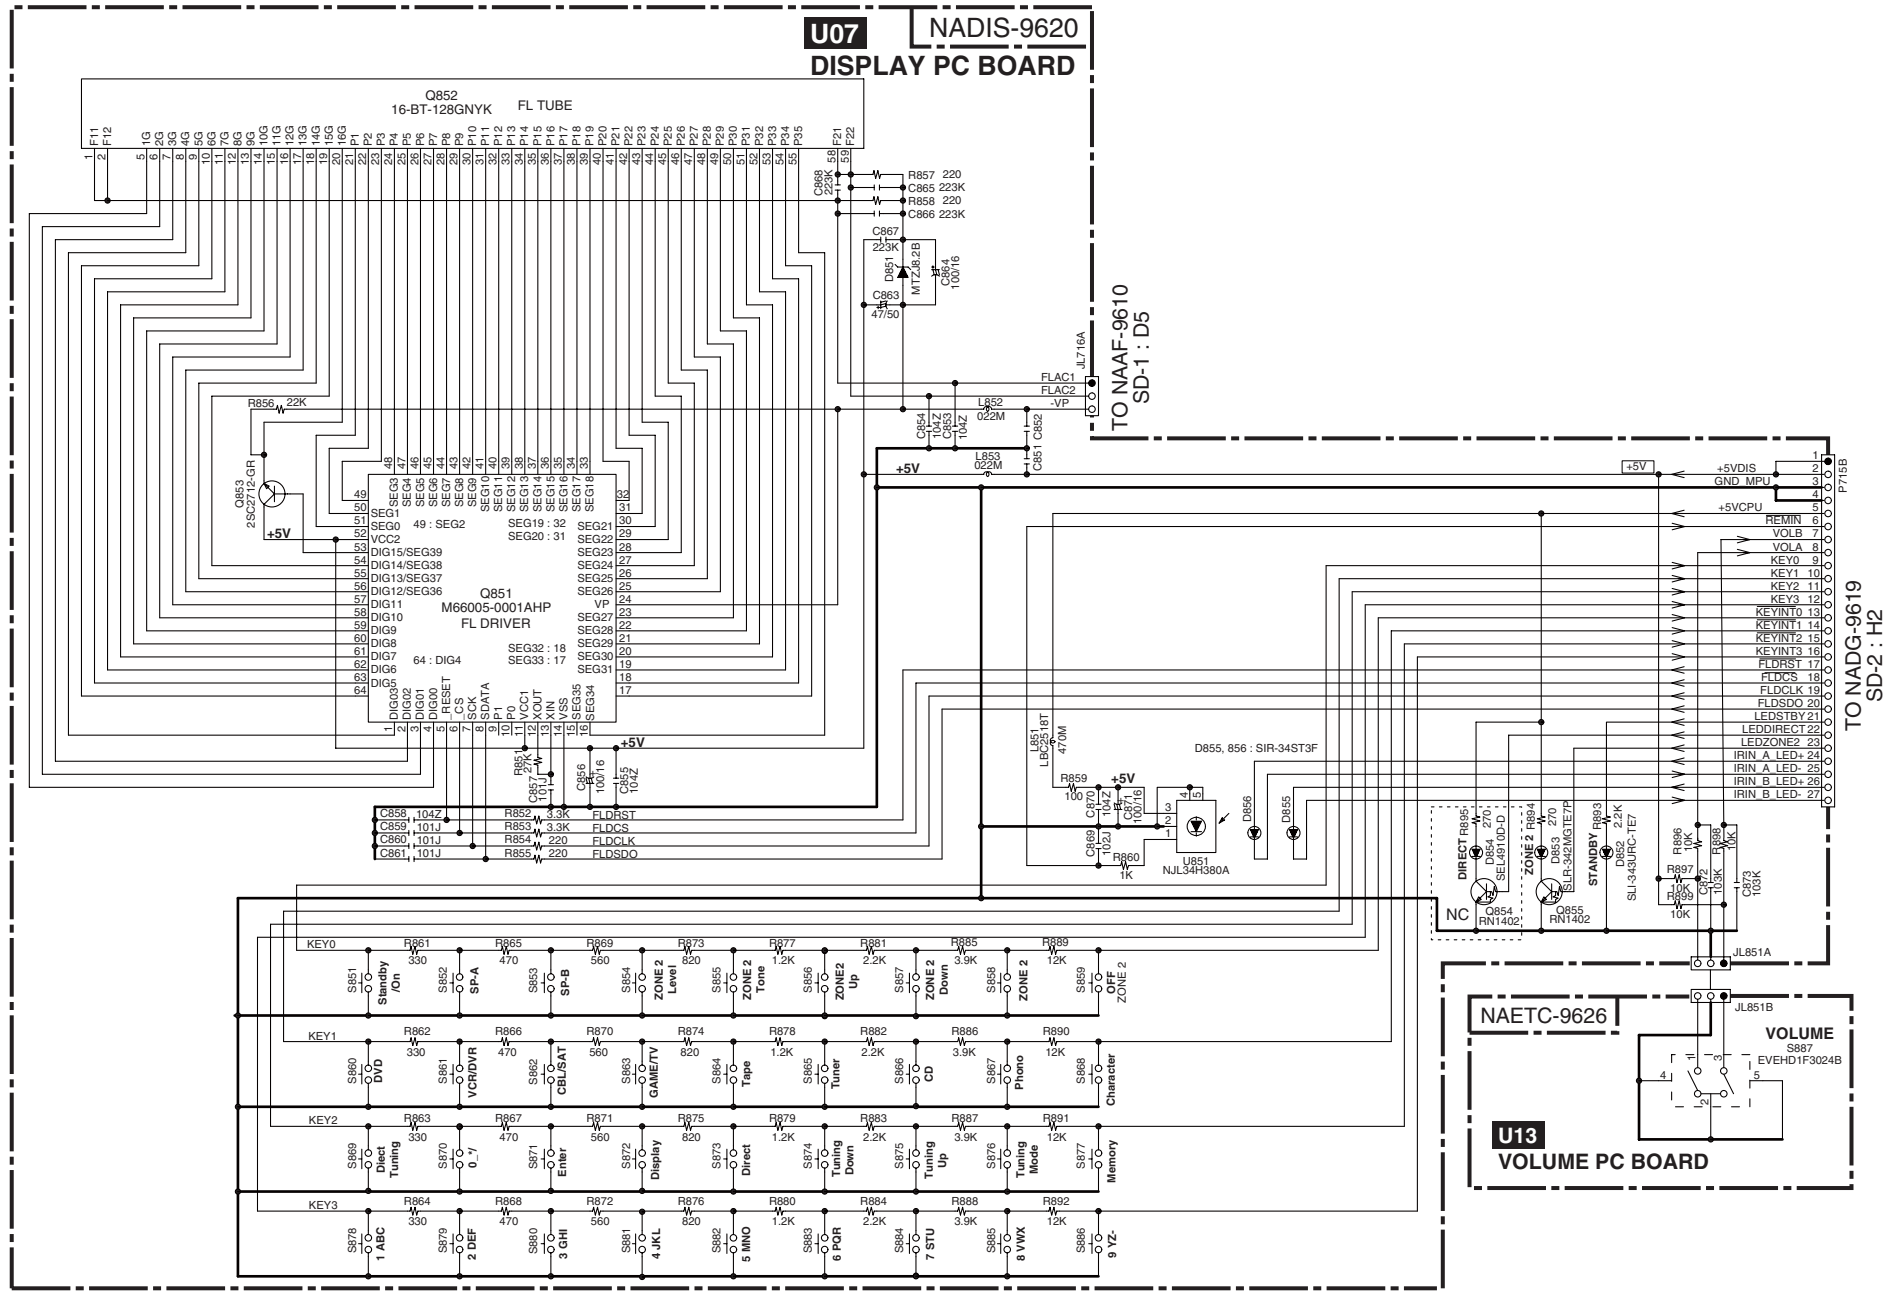

SCHEMATIC DIAGRAMS-4(SD-4)

POWER SUPPLY SECTION

Refer to following table about the parts displayed by mark "**LIST**".

TYPE--->	MDD
T901	NPT-1575D
T902	NPT-1520JQ
F901	6A125V
F902	NONE
F903	5A125V
J904	YES
J905	NONE
J907	YES
J918	NONE
J930	NONE

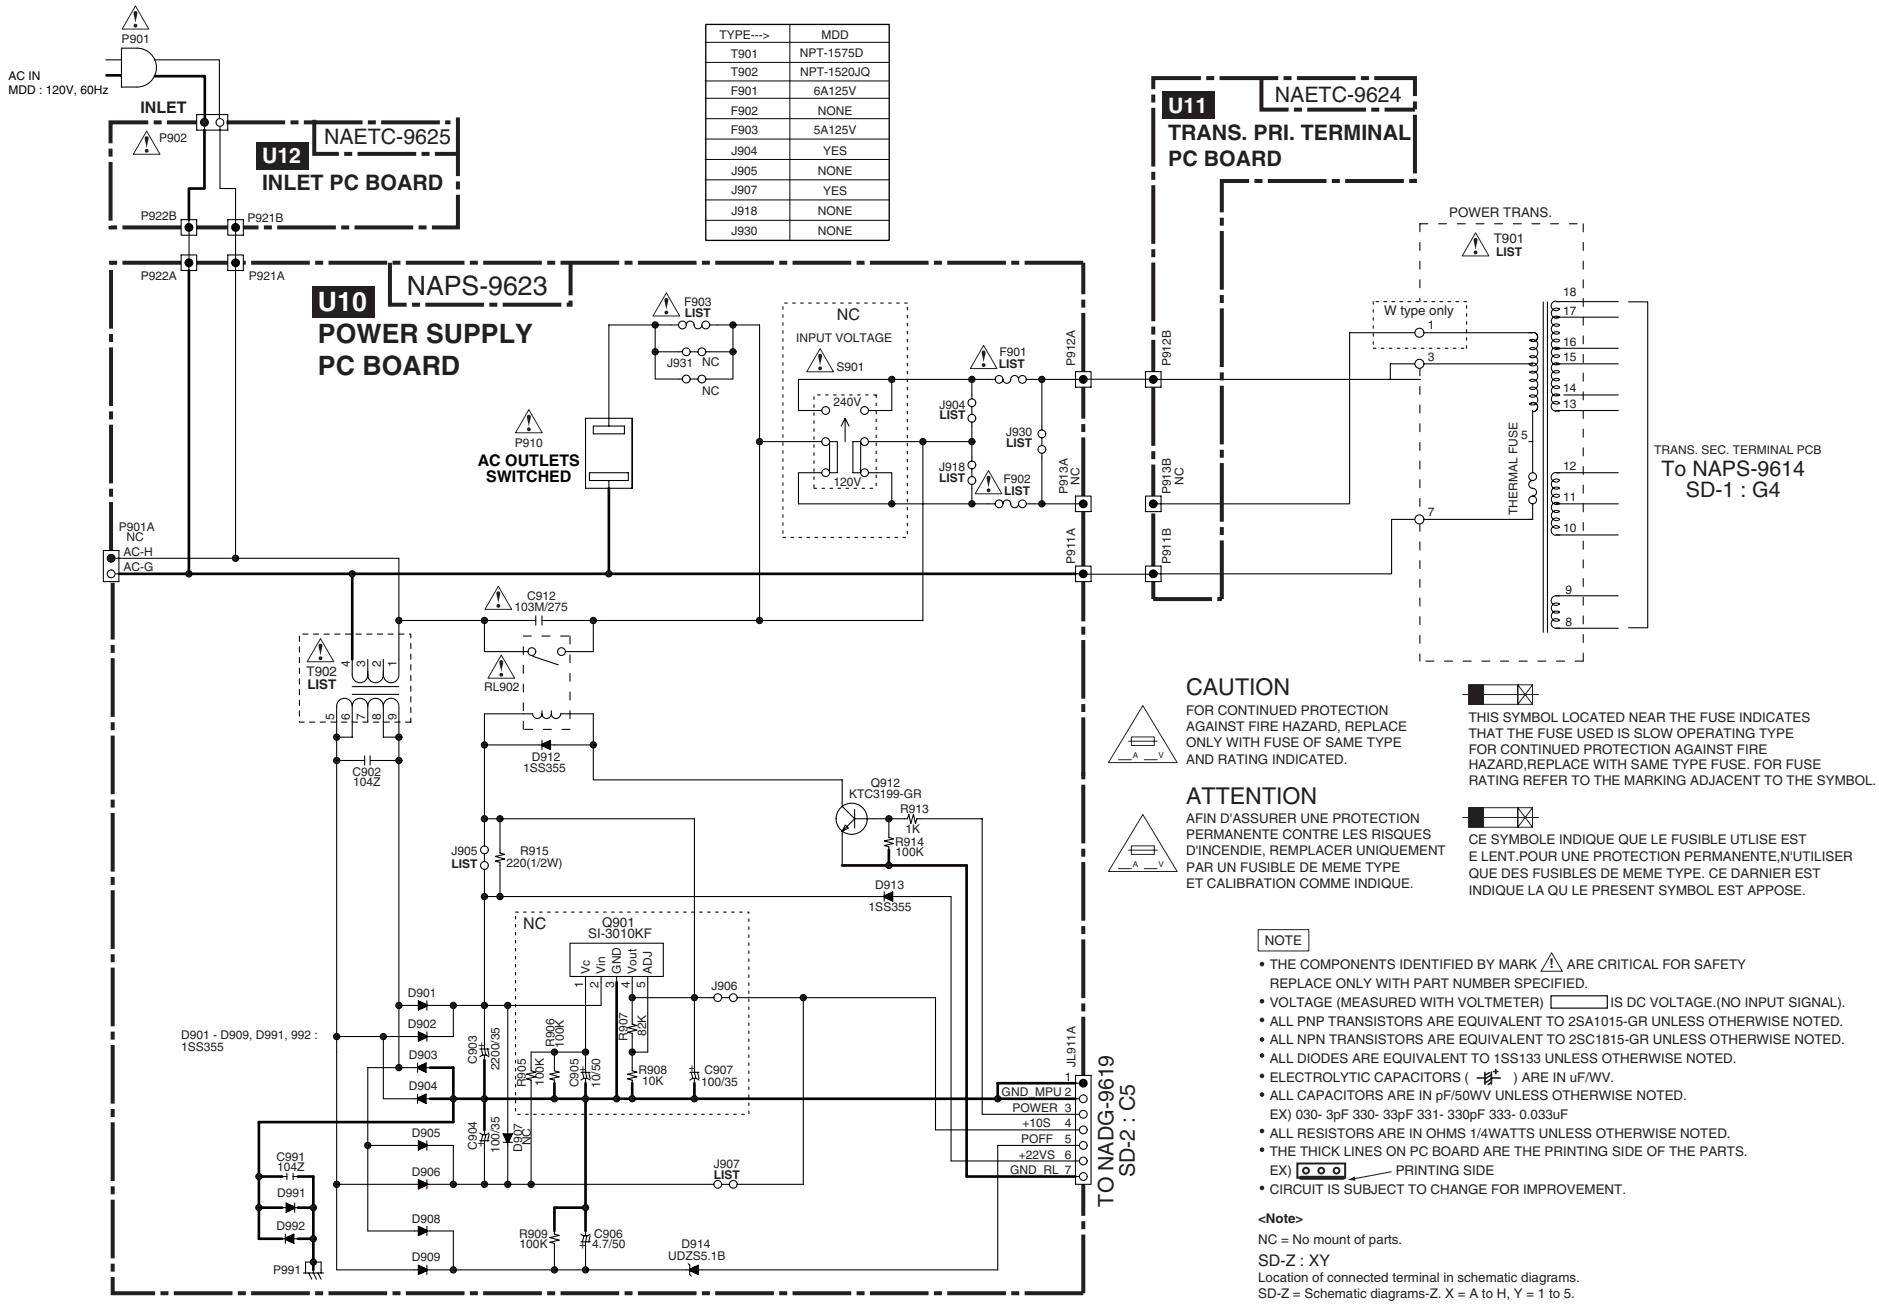

CAUTION

FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.

THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MARKING ADJACENT TO THE SYMBOL.

ATTENTION

AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE, REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTLISE EST E LENT.POUR UNE PROTECTION PERMANENTE,N'UTILISER QUE DES FUSIBLES DE MEME TYPE. CE DARNIER EST INDIQUE LA QU LE PRESENT SYMBOL EST APPOSE.

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) ▭ IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (⏚) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. EX) ▭ ← PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>

NC = No mount of parts.

SD-Z : XY
Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

SCHEMATIC DIAGRAMS-5(SD-5)

VIDEO SECTION

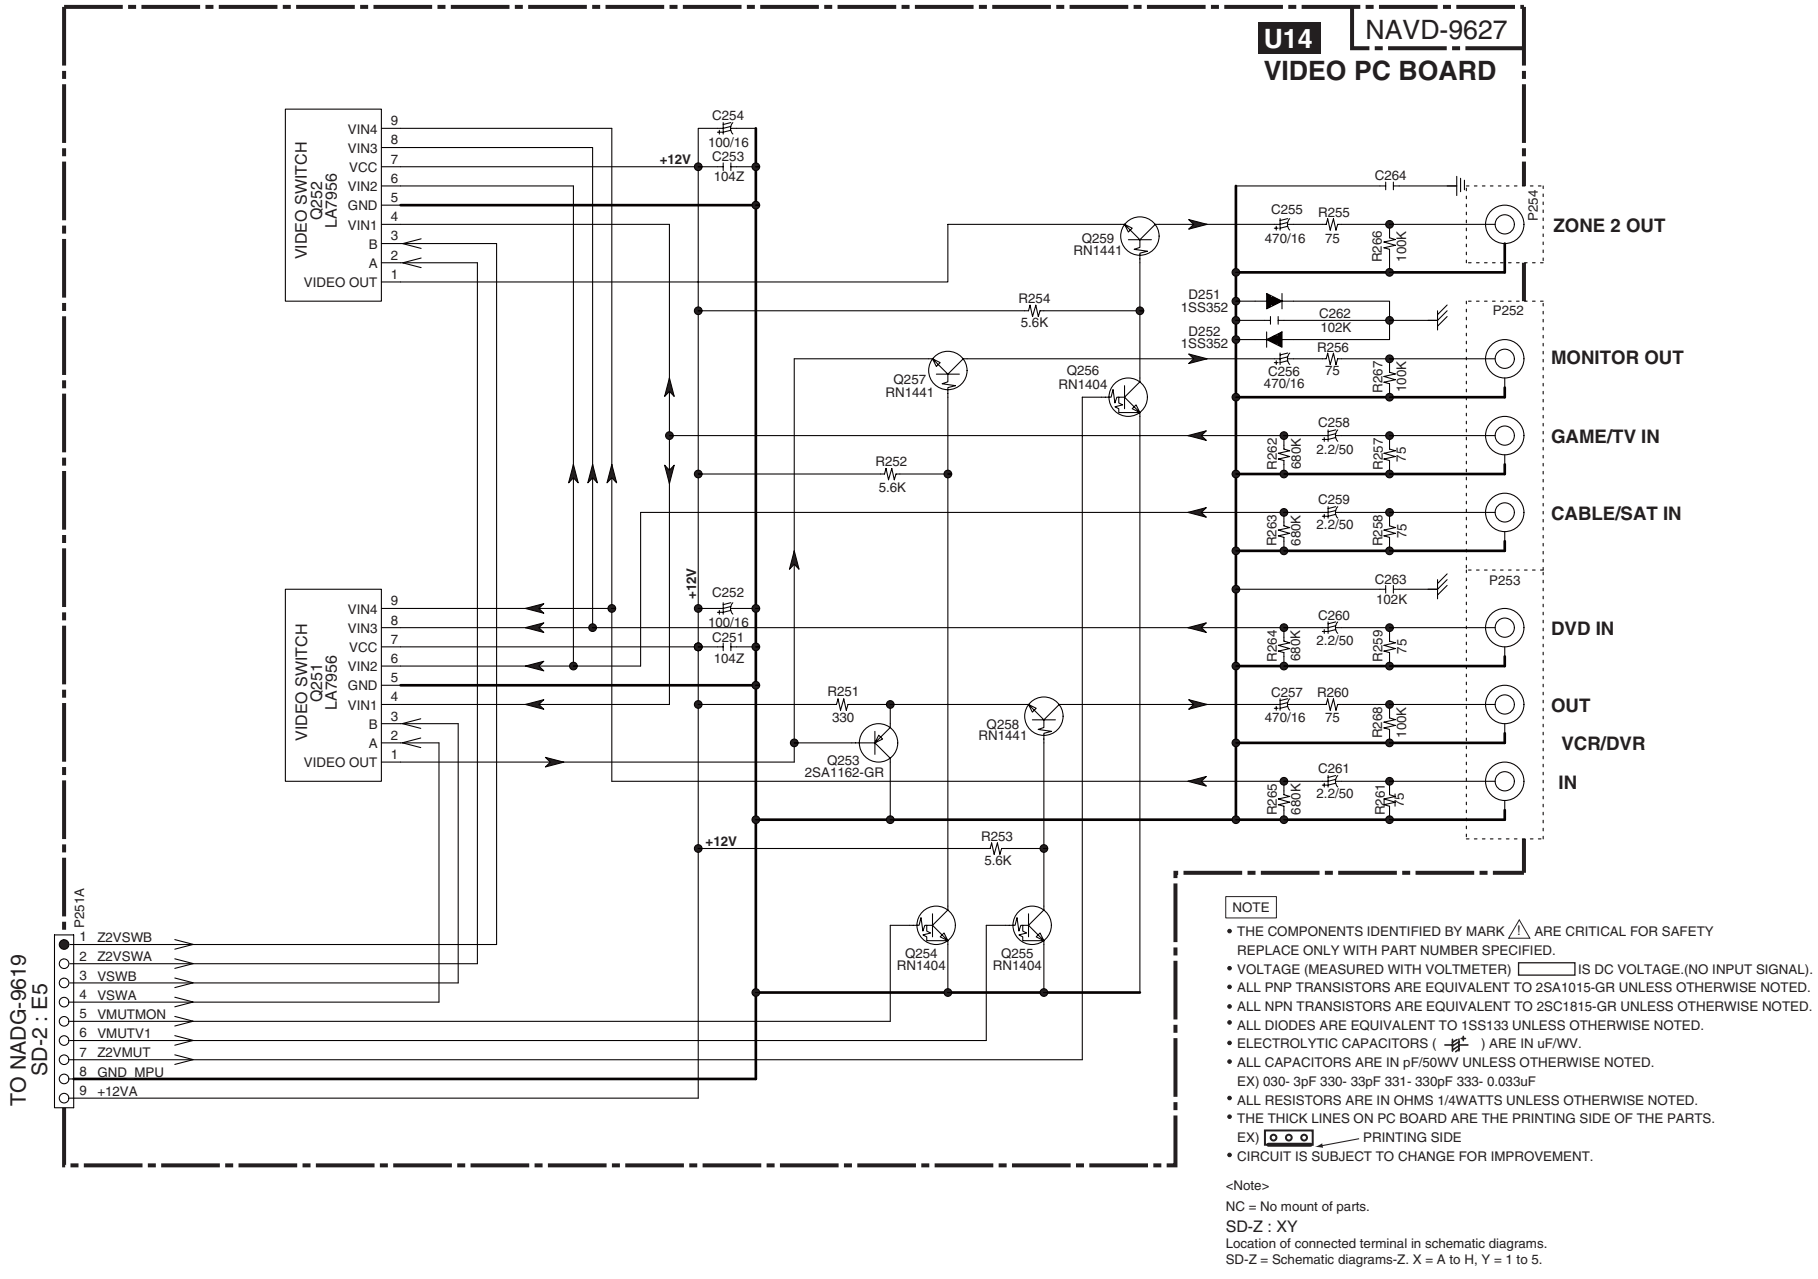

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) [ ] IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (⊣⊢) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
  EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
  EX) ooo PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>

NC = No mount of parts.

SD-Z : XY

Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

SCHEMATIC DIAGRAMS-6(SD-6)

ZONE 2 SECTION

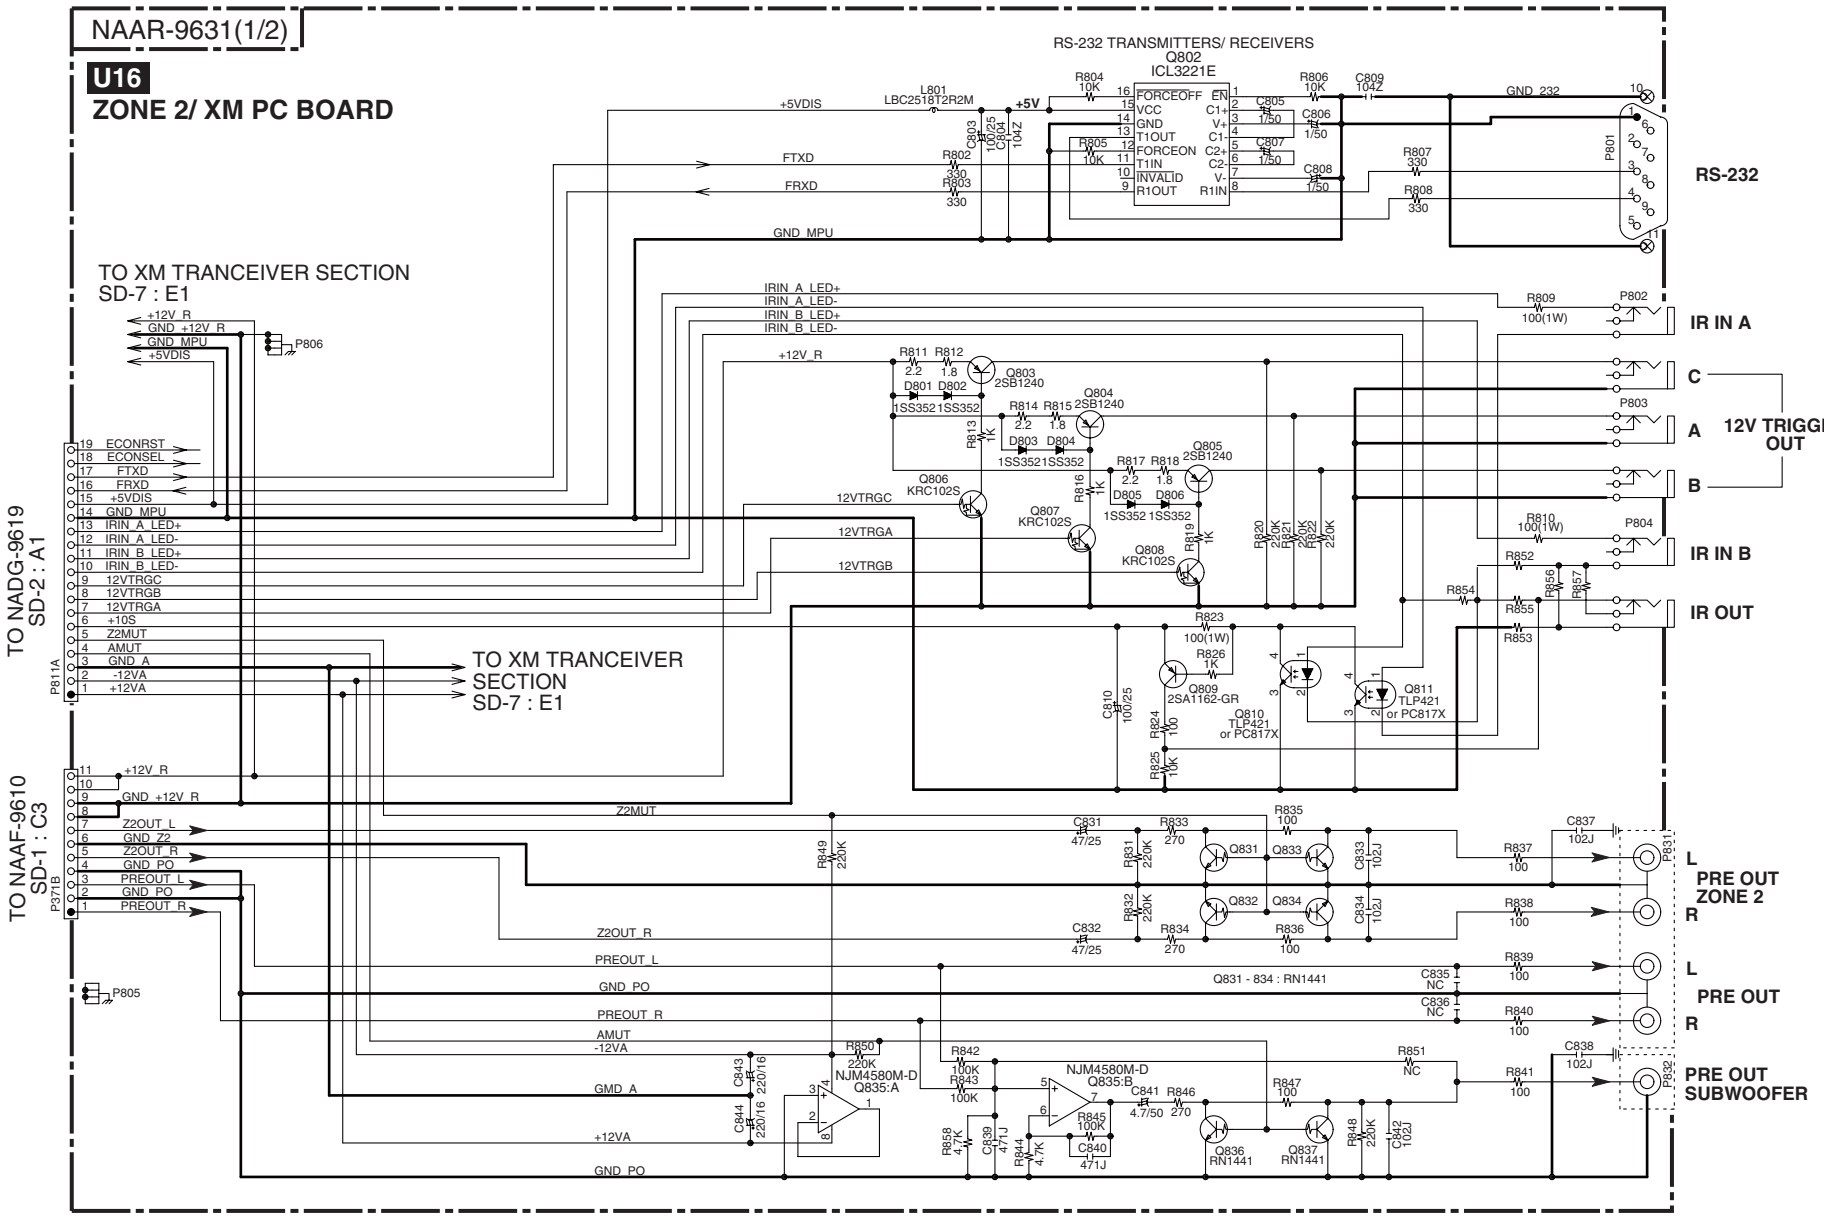

SCHEMATIC DIAGRAMS-7(SD-7)

XM TRANCEIVER SECTION

<Note>
NC = No mount of parts.
SD-Z : XY
Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

NAAR-9631(2/2)

U16
ZONE 2 / XM PC BOARD

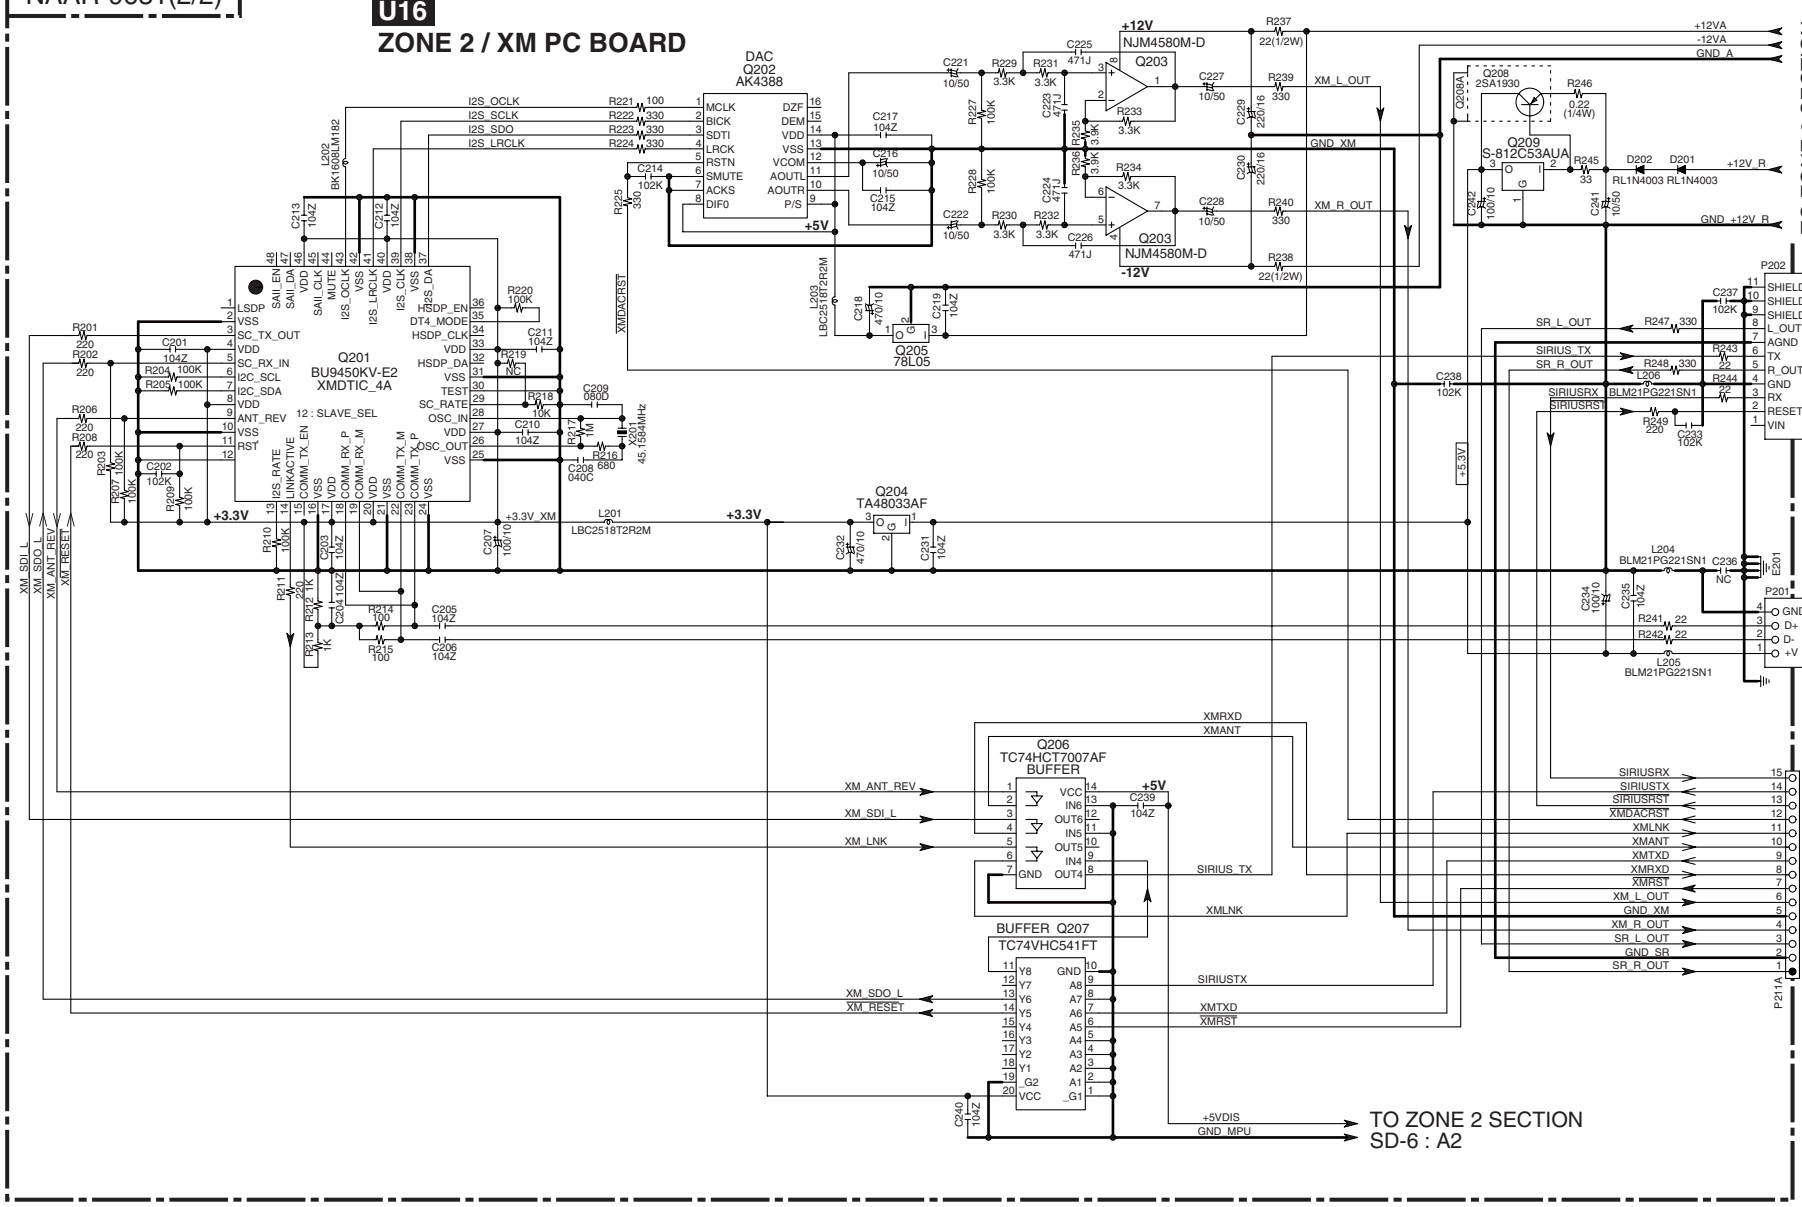

PACKING PROCEDURE

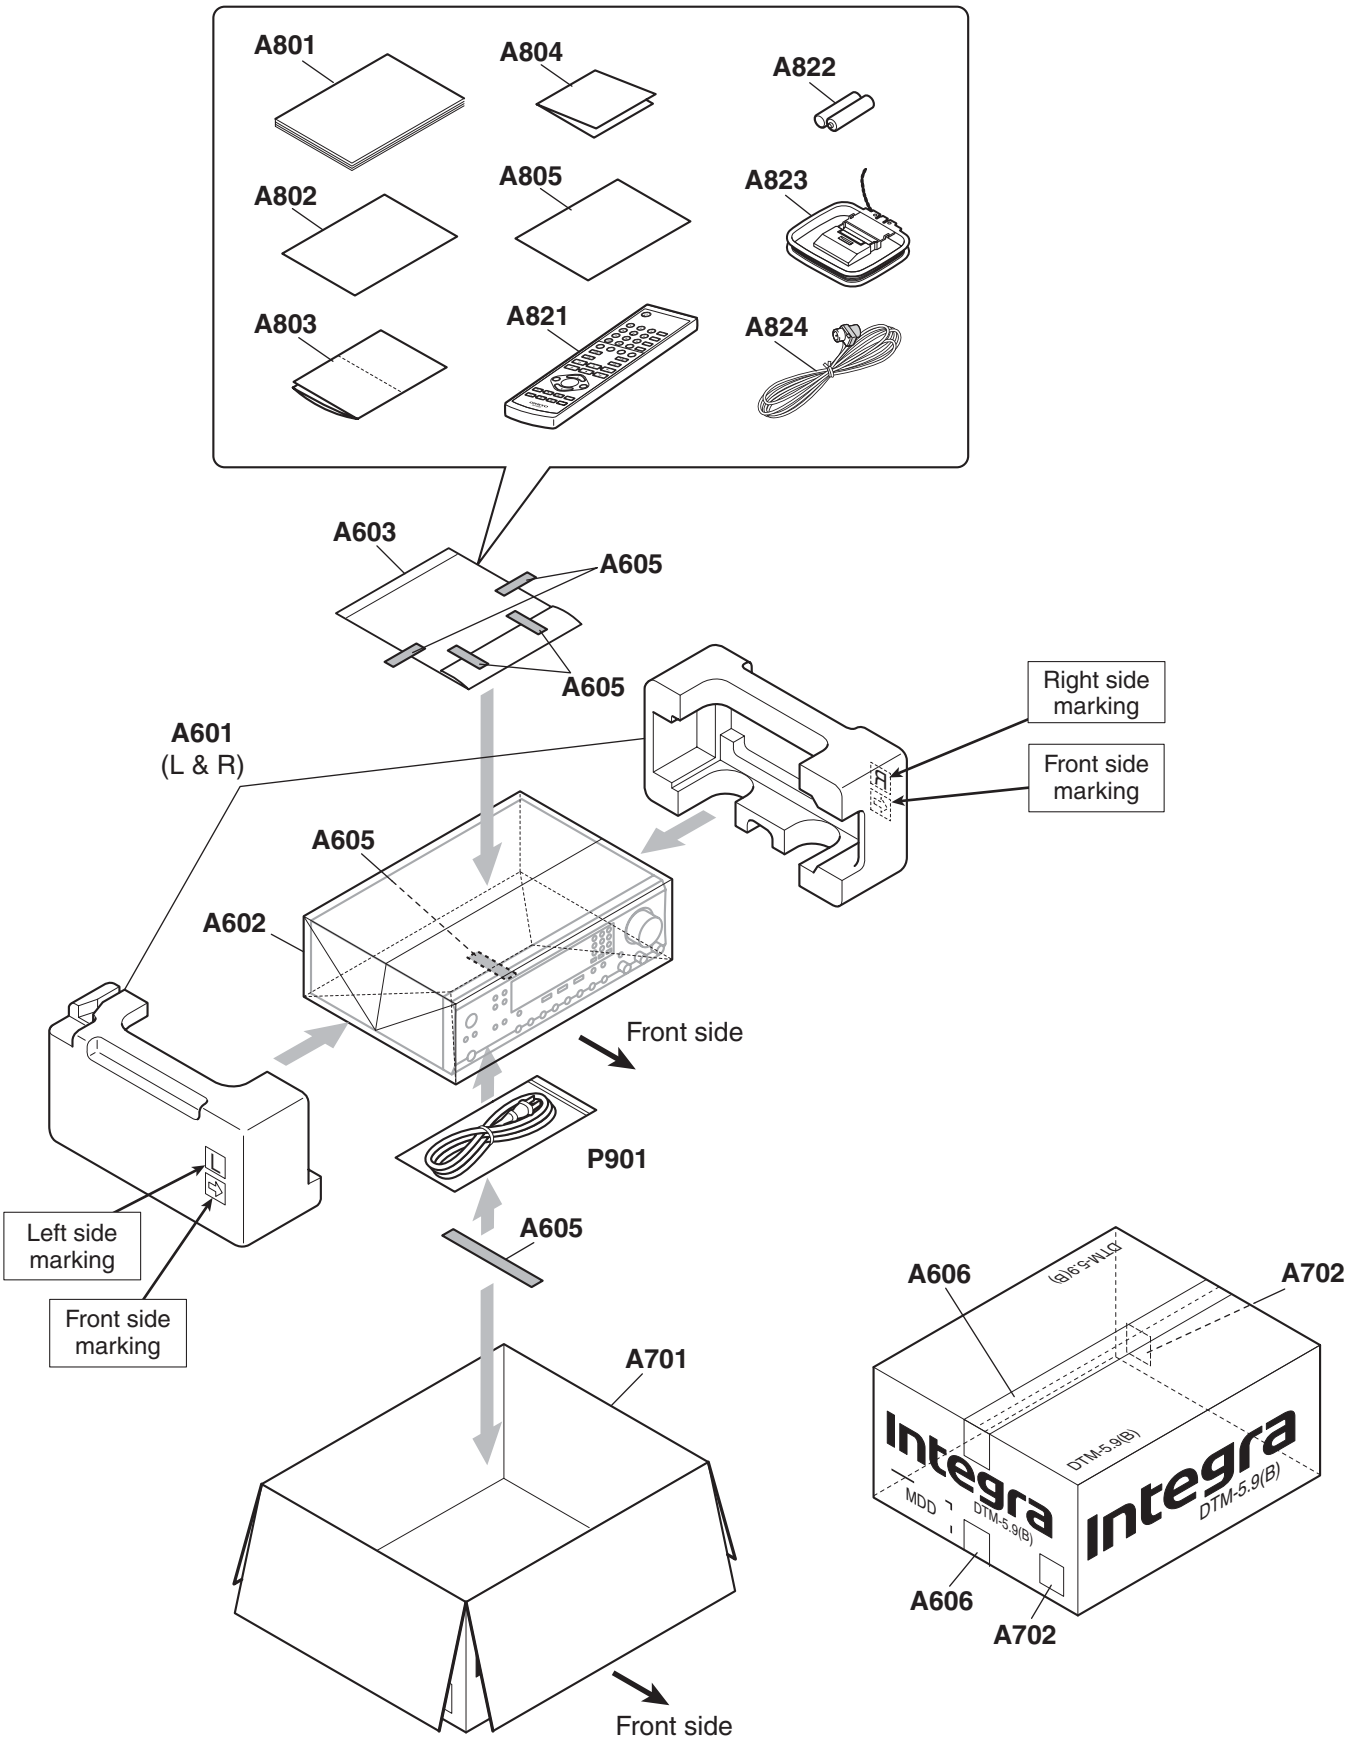

DTM-5.9

<Note>

Parts marked by '**NSP**" are generally unavailable because they are not in our Master Spare Parts List.

NOTE : THE COMPONENTS IDENTIFIED BY THE MARK ! ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

EXPLODED VIEW PARTS LIST

	REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
EV	A001	CHASSIS	TX8555	1	---	NSP
EV	A003	HOLDER	KGLS-16RT	1	27190511	
EV	A005	HOLDER	KGPS-16RF	1	27190991	
EV	A007	HOLDER	KGLS-12RT	1	27190266	
EV	A008	HOLDER	KGLS-22S	1	27190369	
EV	A010	LEG	---	4	27175419	
EV	A011	SCREW	3TTB+8B(3BC)	4	838430088GR	
EV	A012	CUSHION	(LEG)	4	28141660	
EV	A013	F BRACKET	DTM59	1	27111513A	
EV	A014	KNOB	(STANDBY)	1	28325756	
EV	A015	RETAINER	(HP)	1	27141787	
EV	A016	SCREW	3TTB+8B(3CM)SR	14	801637	
EV	A017	SCREW	3TTB+8B(3CM)SR	5	801637	
EV	A019	SCREW	4TTC+8C(3BC)	4	830440089GR	
EV	A020	SPACER	---	1	27270439	
EV	A021	HEAT SINK	233	1	27160594	
EV	A023	RETAINER	(HS-2)	3	27141530A	
EV	A025	SCREW	3TTB+8B(3CM)SR	6	801637	
EV	A027	RETAINER	RETAINER	1	27141671	
EV	A029	SCREW	3TTB+8B(3CM)SR	3	801637	
EV	A031	SCREW	3SMS8W.SW+14B(CU)	6	801634	

EV	A033	SCREW	3TTB+8B(3CM)SR	1	801637	
EV	A035	SCREW	3TTB+8B(3CM)SR	9	801637	
EV	A037	CUSHION	T4L20D10	2	28141566	
EV	A039	KNOB	(VOL)AS	1	28326231	
EV	A040	CUSHION	---	2	28141603-1	
EV	A043	KNOB	(TONE)	3	28325405	
EV	A044	HOLDER	(PLT)	1	27191166A	
EV	A045	CLEAR PLT	DTM59	1	28192207	
EV	A045	B PLATE	---	1	28133401GR	
EV	A201	COVER	(Bent)	1	28184964A	
EV	A201	COVER	(Not bent)	1	28184964AZ	
EV	A202	REAR PANEL	MDD	1	27123867A	
EV	A203	SCREW	3TTB+8B(3BC)	6	838430088GR	
EV	A204	SCREW	3TTB+8B(3BC)	27	838430088GR	
EV	A205	SCREW	3P+6FN(3BC)	1	82143006GR	
EV	A206	LABEL	(COVER)	1	29364123	
EV	A207	SCREW	4TTB+8C(3BC)	2	838440089GR	
EV	A208	IB CUSHION	W15 x 3t TAPE	1	28141585	
EV	A209	SCREW	3TTB+8B(3CM)SR	1	801637	
EV	A210	TAPE	TAPE(CLOTH-16U)	(1)	29110083	
EV	A211	WASHER	W3 x 10F(3BC)	1	87643010GR	
EV	A212	TAPE	TAPE(CLOTH-8U)	(1)	29110082	
EV	A213	LABEL	(PT)	1	29364345	
EV	A214	SPACER	(REAR)	2	27270516	
EV	A215	F PANEL	59MDD	1	27213131A	
EV	A216	CUSHION	180 x 5 x t1	1	28141462	
EV	A217	SCREW	3TTB+8B(3BC)	3	838430088GR	
EV	A218	BADGE	---	1	28135278	
EV	A219	FACET	---	2	28198905	
EV	A223	LABEL	HOOKUP-INTEGRA	1	29363195	
EV	A301	CLIP	CS-1U	2	27255004	
EV	E801	WIRE TIE	BSK-1	7	260208	
EV	F901	FUSE	6A-UL/T-233	1	252327GR	!

EV	F901 or	FUSE	6A-T/UL-ST2	(1)	252259GR	!
EV	F903	FUSE	5A-UL/T-233	1	252326GR	!
EV	F903 or	FUSE	5A-T/UL-ST2	(1)	252258GR	!
EV	F911	FUSE	8A-UL/T-233	1	252329GR	!
EV	F911 or	FUSE	8A-T/UL-ST2	(1)	252261GR	!
EV	F912	FUSE	8A-UL/T-233	1	252329GR	!
EV	F912 or	FUSE	8A-T/UL-ST2	(1)	252261GR	!
EV	F913	FUSE	3.15A-UL/T-233	1	252323GR	!
EV	F913 or	FUSE	3.15A-T/UL-ST2	(1)	252256GR	!
EV	P704	FFC	NCFC7-131012	1	2047131012	
EV	P715	FFC	NCFC7-272012	1	2047272012	
EV	Q521	TR	2SC5200-O	1	2202823	!
EV	Q521 or	TR	2SC5200-R	(1)	2202822	!
EV	Q521A	ISO SHEET	AC262	4	223025	!
EV	Q522	TR	2SC5200-O	1	2202823	!
EV	Q522 or	TR	2SC5200-R	(1)	2202822	!
EV	Q523	TR	2SA1943-O	1	2202813	!
EV	Q523 or	TR	2SA1943-R	(1)	2202812	!
EV	Q524	TR	2SA1943-O	1	2202813	!
EV	Q524 or	TR	2SA1943-R	(1)	2202812	!
EV	**<Note>**					
EV	Must use the same HFE rank mutually about the following parts.					
EV	Ref. No. : Q521 - 524					
EV	D911	DIODE	D10XB60H	1	22380337	!
EV	T901	P TRANS	NPT-1575D	1	2301943	!
EV	U01	AMPLIFIER PC board ass'y	NAAF-9610-1A	1	1B226510-1A	
EV	U02	TONE CONTROL PC board ass'y	NAAF-9611-1A	1	1B226511-1A	
EV	U03	RECTIFIER PC board ass'y	NAPS-9612-1A	1	1B226512-1A	
EV	U04	HOLDER PC board	NAETC-9613-1A	1	---	NSP
EV	U05	TRANS. SEC. TERMINAL PC board ass'y	NAPS-9614-1A	1	1B226514-1A	
EV	U06	MICROPROCESSOR PC board ass'y	NADG-9619-1A	1	1B226519-1A	
EV	U07	DISPLAY PC board ass'y	NADIS-9620-1A	1	1B226520-1A	
EV	U08	THERMAL SENSOR PC board ass'y	NAETC-9621-1A	1	---	NSP

EV	U09	HOLDER PC board	NAETC-9622-1A	1	---	NSP
EV	U10	POWER SUPPLY PC board ass'y	NAPS-9623-1A	1	1B226523-1A	
EV	U11	TRANS. PRI. TERMINAL PC board ass'y	NAETC-9624-1A	1	---	NSP
EV	U12	INLET PC board ass'y	NAETC-9625-1A	1	---	NSP
EV	U13	VOLUME PC board ass'y	NAETC-9626-1A	1	---	NSP
EV	U14	VIDEO PC board ass'y	NAVD-9627-1A	1	1B226527-1A	
EV	U15	HEADPHONE JACK PC board ass'y	NAETC-9628-1A	1	---	NSP
EV	U16	ZONE 2/ XM PC board ass'y	NAAR-9631-1A	1	1B226531-1A	
EV	U17	TUNER UNIT	FAE385-A11US	1	240152	
EV	U17 or	TUNER UNIT	ENG06507QFUS	(1)	240156	

DTM-5.9

PC BOARD PARTS LIST

PCB1 **U01** AMPLIFIER PC BOARD (NAAF-9610-1A)
PCB1 **U02** TONE CONTROL PC BOARD (NAAF-9611-1A)
PCB1 **U03** RECTIFIER PC BOARD (NAPS-9612-1A)
PCB1 **U05** TRANS. SEC. TERMINAL PC BOARD (NAPS-9614-1A)
PCB1

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB1	Q301	IC	NJM4558D-X	1	222502	
PCB1	Q302	IC	R2S15211FP	1	22242297R3	
PCB1	Q361	TR	2SC1815-GR	1	2211255T	
PCB1	Q362	TR	2SA1015-GR	1	2211455T	
PCB1	Q401	IC	NJM2068L-D	1	22240250	
PCB1	Q403	IC	NJM2068L-D	1	22240250	
PCB1	Q452	TR	DTC123JS	1	2213640T	
PCB1	Q452 or	TR	KRC105M	(1)	2215830T	
PCB1	Q491	TR	RN1241-A(TPE4_F)	1	2213631T	
PCB1	Q491 or	TR	RN1241-B	(1)	2213632T	
PCB1	Q492	TR	RN1241-A(TPE4_F)	1	2213631T	
PCB1	Q492 or	TR	RN1241-B	(1)	2213632T	
PCB1	Q493	TR	KRA102M	1	2215770T	

PCB1	Q493 or	TR	DTA114ES	(1)	2213510T
PCB1	Q495	TR	RN1241-A(TPE4_F)	1	2213631T
PCB1	Q495 or	TR	RN1241-B	(1)	2213632T
PCB1	Q496	TR	RN1241-A(TPE4_F)	1	2213631T
PCB1	Q496 or	TR	RN1241-B	(1)	2213632T
PCB1	Q501	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q502	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q503	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q504	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q505	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q505 or	TR	2SC2240-GR	(1)	2211405T
PCB1	Q506	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q506 or	TR	2SC2240-GR	(1)	2211405T
PCB1	Q507	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q507 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q508	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q508 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q509	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q509 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q510	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q510 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q513	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q513 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q514	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q514 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q515	TR	2SC2229-Y(TPE6_F)	1	2211634T
PCB1	Q515 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
PCB1	Q516	TR	2SC2229-Y(TPE6_F)	1	2211634T
PCB1	Q516 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
PCB1	Q517	TR	2SC5171(ONK_Q)	1	2203010
PCB1	Q518	TR	2SC5171(ONK_Q)	1	2203010
PCB1	Q519	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q520	TR	2SA1930(ONK_Q)	1	2203000

PCB1	Q527	TR	2SC2229-Y(TPE6_F)	1	2211634T
PCB1	Q527 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
PCB1	Q528	TR	2SC2229-Y(TPE6_F)	1	2211634T
PCB1	Q528 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
PCB1	Q529	TR	2SC2458-GR	1	2212115T
PCB1	Q529 or	TR	2SC2458-BL	(1)	2212116T
PCB1	Q529 or	TR	KTC3199-GR	(1)	2215864T
PCB1	Q530	TR	2SC2458-GR	1	2212115T
PCB1	Q530 or	TR	2SC2458-BL	(1)	2212116T
PCB1	Q530 or	TR	KTC3199-GR	(1)	2215864T
PCB1	Q531	TR	2SC1740S-S	1	2213285T
PCB1	Q532	TR	2SC1740S-S	1	2213285T
PCB1	Q533	TR	2SC1740S-S	1	2213285T
PCB1	Q534	TR	2SC1740S-S	1	2213285T
PCB1	Q581	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q581 or	TR	2SC2240-GR	(1)	2211405T
PCB1	Q582	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q582 or	TR	2SC2240-GR	(1)	2211405T
PCB1	Q583	TR	2SA970-GR	1	2211395T
PCB1	Q583 or	TR	2SA970-BL(TPE2_F)	(1)	2211396T
PCB1	Q583 or	TR	KTA1268-GR	(1)	2215885T
PCB1	Q583 or	TR	KTA1268-BL	(1)	2215886T
PCB1	Q591	TR	DTC123JS	1	2213640T
PCB1	Q591 or	TR	KRC105M	(1)	2215830T
PCB1	Q592	TR	DTC123JS	1	2213640T
PCB1	Q592 or	TR	KRC105M	(1)	2215830T
PCB1	Q921	IC	78M12HF(NJM78M12FA)	1	222780125JRC
PCB1	Q921 or	IC	MPC78M12AHF-AZ	(1)	222780125NEC
PCB1	Q921A	HEAT SINK	RAD-164	1	27160499
PCB1	Q921C	SCREW	3P+6FN(3BC)	1	82143006GR
PCB1	Q922	IC	79M12HF(NJM79M12FA)	1	222790125JRC
PCB1	Q922 or	IC	79M12HF(MPC79M12HF)	(1)	222790125NEC
PCB1	Q922C	SCREW	3P+6FN(3BC)	1	82143006GR

PCB1	Q924	TR	2SA965-Y(TPE6_F)	1	2211644T
PCB1	Q925	TR	DTC123JS	1	2213640T
PCB1	Q925 or	TR	KRC105M	(1)	2215830T
PCB1	D361	ZENER D	MTZJ7.5B	1	224470752T
PCB1	D362	ZENER D	MTZJ7.5B	1	224470752T
PCB1	D450	DIODE	1SS133	1	223163T
PCB1	D491	DIODE	1SS133	1	223163T
PCB1	D511	DIODE	1SS133	1	223163T
PCB1	D512	DIODE	1SS133	1	223163T
PCB1	D571	ZENER D	MTZJ5.1B	1	224470512T
PCB1	D591	DIODE	1SS133	1	223163T
PCB1	D592	DIODE	1SS133	1	223163T
PCB1	D912	DIODE	D10XB60H	1	22380337F
PCB1	D920	DIODE	RL1N4003	1	22380260T
PCB1	D921	DIODE	RL1N4003	1	22380260T
PCB1	D922	ZENER D	MTZJ33B	1	224473302T
PCB1	D924	DIODE	RL1N4003	1	22380260T
PCB1	D931	DIODE	RL1N4003	1	22380260T
PCB1	D932	DIODE	RL1N4003	1	22380260T
PCB1	D933	DIODE	RL1N4003	1	22380260T
PCB1	D934	DIODE	RL1N4003	1	22380260T
PCB1	D951	DIODE	1SS133	1	223163T
PCB1	D952	DIODE	1SS133	1	223163T
PCB1	D953	DIODE	1SS133	1	223163T
PCB1	D954	ZENER D	MTZJ4.7B	1	224470472T
PCB1	D961	DIODE	D3SBA20	1	22380271F
PCB1	D961 or	DIODE	RBV402	(1)	22380022F
PCB1	D983	DIODE	1SS133	1	223163T
PCB1	D984	DIODE	1SS133	1	223163T
PCB1	L501	S COIL	S-1.3C	1	231176S
PCB1	L502	S COIL	S-1.3C	1	231176S
PCB1	C301	TF C	ECQ-B50V-471J	1	374724714T
PCB1	C302	TF C	ECQ-B50V-471J	1	374724714T

PCB1	C303	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C304	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C305	TF C	ECQ-B50V-152J	1	374721524T
PCB1	C306	TF C	ECQ-B50V-152J	1	374721524T
PCB1	C307	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
PCB1	C308	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
PCB1	C309	TF C	ECQ-B50V-682J	1	374726824T
PCB1	C310	TF C	ECQ-B50V-682J	1	374726824T
PCB1	C311	TF C	ECQ-B50V-182J	1	374721824T
PCB1	C312	TF C	ECQ-B50V-182J	1	374721824T
PCB1	C313	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB1	C314	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB1	C315	VR C	CE04W16V-220M(VR)	1	394642217T
PCB1	C316	VR C	CE04W16V-220M(VR)	1	394642217T
PCB1	C341	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C342	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C343	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C345	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C361	VR C	CE04W16V-220M(VR)	1	394642217T
PCB1	C362	VR C	CE04W16V-220M(VR)	1	394642217T
PCB1	C363	VR C	CE04W10V-470M(VR)	1	394634717T
PCB1	C364	VR C	CE04W10V-470M(VR)	1	394634717T
PCB1	C365	VR C	CE04W16V-220M(VR)	1	394642217T
PCB1	C366	VR C	CE04W16V-220M(VR)	1	394642217T
PCB1	C371	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C372	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C373	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C374	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C375	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C376	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C377	TF C	ECQ-B50V-223J	1	374722234T
PCB1	C378	TF C	ECQ-B50V-223J	1	374722234T
PCB1	C379	TF C	ECQ-V50V-474J	1	374724744T

PCB1	C380	TF C	ECQ-V50V-474J	1	374724744T
PCB1	C381	TF C	ECQ-V50V-823J	1	374728234T
PCB1	C382	TF C	ECQ-V50V-823J	1	374728234T
PCB1	C383	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C384	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C385	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C386	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C388	TF C	ECQ-V50V-474J	1	374724744T
PCB1	C391	TF C	ECQ-B50V-101K	1	374721015T
PCB1	C392	TF C	ECQ-B50V-101K	1	374721015T
PCB1	C401	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C402	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C403	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C404	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C405	TF C	ECQ-V50V-473J	1	374724734T
PCB1	C406	TF C	ECQ-V50V-473J	1	374724734T
PCB1	C407	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C408	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C409	TF C	ECQ-V50V-224J	1	374722244T
PCB1	C410	TF C	ECQ-V50V-224J	1	374722244T
PCB1	C411	TF C	ECQ-B50V-153J	1	374721534T
PCB1	C412	TF C	ECQ-B50V-153J	1	374721534T
PCB1	C413	TF C	ECQ-V50V-823J	1	374728234T
PCB1	C414	TF C	ECQ-V50V-823J	1	374728234T
PCB1	C415	VR C	CE04W16V-220M(VR)	1	394642217T
PCB1	C416	VR C	CE04W16V-220M(VR)	1	394642217T
PCB1	C423	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C424	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C425	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C426	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C428	TF C	ECQ-V50V-334J	1	374723344T
PCB1	C429	TF C	ECQ-V50V-334J	1	374723344T
PCB1	C442	UTSP C	CE04W50V-1M(UTSP)	1	397580107T

PCB1	C451	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C452	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C453	TF C	ECQ-B50V-101K	1	374721015T
PCB1	C454	TF C	ECQ-B50V-101K	1	374721015T
PCB1	C455	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C456	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C459	TF C	ECQ-B50V-103J	1	374721034T
PCB1	C461	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C462	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C501	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
PCB1	C502	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
PCB1	C503	TF C	ECQ-B50V-101K	1	374721015T
PCB1	C504	TF C	ECQ-B50V-101K	1	374721015T
PCB1	C505	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
PCB1	C506	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
PCB1	C509	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB1	C510	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB1	C513	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C514	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB1	C515	TF C	ECQ-B50V-101K	1	374721015T
PCB1	C516	TF C	ECQ-B50V-101K	1	374721015T
PCB1	C517	TF C	ECQ-V50V-473J	1	374724734T
PCB1	C518	TF C	ECQ-V50V-473J	1	374724734T
PCB1	C519	TF C	ECQ-V50V-104J	1	374721044T
PCB1	C520	TF C	ECQ-V50V-104J	1	374721044T
PCB1	C521	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB1	C522	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB1	C523	CERA C	CC45SL50V-020C	1	345020201T
PCB1	C524	CERA C	CC45SL50V-020C	1	345020201T
PCB1	C527	VR C	CE04W100V-47M(VR)	1	394694707T
PCB1	C528	VR C	CE04W100V-47M(VR)	1	394694707T
PCB1	C529	TF C	ECQ-B50V-101K	1	374721015T
PCB1	C530	TF C	ECQ-B50V-101K	1	374721015T

PCB1	C531	TF C	ECQ-B50V-102J	1	374721024T
PCB1	C532	TF C	ECQ-B50V-102J	1	374721024T
PCB1	C533	TF C	ECQ-B50V-102J	1	374721024T
PCB1	C534	TF C	ECQ-B50V-102J	1	374721024T
PCB1	C535	TF C	ECQ-B50V-102J	1	374721024T
PCB1	C536	TF C	ECQ-B50V-102J	1	374721024T
PCB1	C581	VR C	CE04W16V-100M(VR)	1	394641017T
PCB1	C582	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C583	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
PCB1	C591	TF C	ECQ-B50V-103J	1	374721034T
PCB1	C592	TF C	ECQ-B50V-103J	1	374721034T
PCB1	C911	TF C	ECQ-V100-334J	1	374733344T
PCB1	C912	TF C	ECQ-V100-334J	1	374733344T
PCB1	C915	ELECT C	CE69W69V-10000MA	1	3504425
PCB1	C916	ELECT C	CE69W69V-10000MA	1	3504425
PCB1	C918	VR C	CE04W35V-1000M(VR)	1	394661027S
PCB1	C919	UTSP C	CE04W35V-330M(UTSP)	1	397563317T
PCB1	C920	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C921	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C922	VR C	CE04W35V-47M(VR)	1	394664707T
PCB1	C923	VR C	CE04W35V-47M(VR)	1	394664707T
PCB1	C924	TF C	ECQ-V50V-334J	1	374723344T
PCB1	C925	TF C	ECQ-V50V-334J	1	374723344T
PCB1	C926	UTSP C	CE04W50V-100M(UTSP)	1	397581017T
PCB1	C928	UTSP C	CE04W50V-100M(UTSP)	1	397581017T
PCB1	C930	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C931	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C941	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB1	C953	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T
PCB1	C961	TF C	ECQ-V50V-334J	1	374723344T
PCB1	C962	VR C	CE04W25V-4700M(VR)	1	394654727S
PCB1	C971	CERA C	CK45F50V-223Z	1	335622230T
PCB1	C982	TF C	ECQ-B50V-222J	1	374722224T

PCB1	C991	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C992	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	R301	CARBON R	R16J-1K	1	417341024T	
PCB1	R302	CARBON R	R16J-1K	1	417341024T	
PCB1	R303	CARBON R	R16J-56K	1	417345634T	
PCB1	R304	CARBON R	R16J-56K	1	417345634T	
PCB1	R305	CARBON R	R16J-220K	1	417342244T	
PCB1	R306	CARBON R	R16J-220K	1	417342244T	
PCB1	R307	CARBON R	R16J-820	1	417348214T	
PCB1	R308	CARBON R	R16J-820	1	417348214T	
PCB1	R309	CARBON R	R16J-470K	1	417344744T	
PCB1	R310	CARBON R	R16J-470K	1	417344744T	
PCB1	R311	CARBON R	R16J-39K	1	417343934T	
PCB1	R312	CARBON R	R16J-39K	1	417343934T	
PCB1	R313	CARBON R	R16J-100K	1	417341044T	
PCB1	R314	CARBON R	R16J-100K	1	417341044T	
PCB1	R315	CARBON R	R16J-330	1	417343314T	
PCB1	R316	CARBON R	R16J-330	1	417343314T	
PCB1	R317	CARBON R	R16J-1M	1	417341054T	
PCB1	R318	CARBON R	R16J-1M	1	417341054T	
PCB1	R319	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R320	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R321	CARBON R	R16J-1M	1	417341054T	
PCB1	R322	CARBON R	R16J-1M	1	417341054T	
PCB1	R323	CARBON R	R16J-330	1	417343314T	
PCB1	R324	CARBON R	R16J-330	1	417343314T	
PCB1	R325	CARBON R	R16J-1M	1	417341054T	
PCB1	R326	CARBON R	R16J-1M	1	417341054T	
PCB1	R327	CARBON R	R16J-330	1	417343314T	
PCB1	R328	CARBON R	R16J-330	1	417343314T	
PCB1	R329	CARBON R	R16J-1M	1	417341054T	
PCB1	R330	CARBON R	R16J-1M	1	417341054T	
PCB1	R331	CARBON R	R16J-330	1	417343314T	

PCB1	R332	CARBON R	R16J-330	1	417343314T
PCB1	R333	CARBON R	R16J-1M	1	417341054T
PCB1	R334	CARBON R	R16J-1M	1	417341054T
PCB1	R335	CARBON R	R16J-330	1	417343314T
PCB1	R336	CARBON R	R16J-330	1	417343314T
PCB1	R337	CARBON R	R16J-1M	1	417341054T
PCB1	R338	CARBON R	R16J-1M	1	417341054T
PCB1	R339	CARBON R	R16J-2.2K	1	417342224T
PCB1	R340	CARBON R	R16J-2.2K	1	417342224T
PCB1	R341	CARBON R	R16J-1M	1	417341054T
PCB1	R342	CARBON R	R16J-1M	1	417341054T
PCB1	R343	CARBON R	R16J-330	1	417343314T
PCB1	R344	CARBON R	R16J-330	1	417343314T
PCB1	R345	CARBON R	R16J-1M	1	417341054T
PCB1	R346	CARBON R	R16J-1M	1	417341054T
PCB1	R349	CARBON R	R16J-22K	1	417342234T
PCB1	R350	CARBON R	R16J-22K	1	417342234T
PCB1	R353	NF CARBON R	R25J-10	1	415471004T
PCB1	R354	NF CARBON R	R25J-10	1	415471004T
PCB1	R361	METAL O R	RS1/2WBJ-68	1	443526804T
PCB1	R362	METAL O R	RS1/2WBJ-68	1	443526804T
PCB1	R363	NF CARBON R	R25J-470	1	415474714T
PCB1	R364	NF CARBON R	R25J-470	1	415474714T
PCB1	R371	CARBON R	R16J-1K	1	417341024T
PCB1	R372	CARBON R	R16J-1K	1	417341024T
PCB1	R373	CARBON R	R16J-1K	1	417341024T
PCB1	R375	CARBON R	R16J-1.8K	1	417341824T
PCB1	R376	CARBON R	R16J-1.8K	1	417341824T
PCB1	R377	CARBON R	R16J-10K	1	417341034T
PCB1	R378	CARBON R	R16J-10K	1	417341034T
PCB1	R393	VARI R	N11RLC250KWT20Z	1	5104288
PCB1	R401	CARBON R	R16J-1K	1	417341024T
PCB1	R402	CARBON R	R16J-1K	1	417341024T

PCB1	R403	CARBON R	R16J-220K	1	417342244T
PCB1	R404	CARBON R	R16J-220K	1	417342244T
PCB1	R405	CARBON R	R16J-22K	1	417342234T
PCB1	R406	CARBON R	R16J-22K	1	417342234T
PCB1	R407	CARBON R	R16J-3.3K	1	417343324T
PCB1	R408	CARBON R	R16J-3.3K	1	417343324T
PCB1	R409	VARI R	N14RGLC100KC20Z	1	5132537
PCB1	R411	CARBON R	R16J-220	1	417342214T
PCB1	R412	CARBON R	R16J-220	1	417342214T
PCB1	R413	CARBON R	R16J-1K	1	417341024T
PCB1	R414	CARBON R	R16J-1K	1	417341024T
PCB1	R415	VARI R	N14RGLC50KC20Z	1	5132538
PCB1	R417	CARBON R	R16J-4.7K	1	417344724T
PCB1	R418	CARBON R	R16J-4.7K	1	417344724T
PCB1	R419	CARBON R	R16J-4.7K	1	417344724T
PCB1	R420	CARBON R	R16J-4.7K	1	417344724T
PCB1	R435	CARBON R	R16J-220K	1	417342244T
PCB1	R436	CARBON R	R16J-2.2K	1	417342224T
PCB1	R441	NF CARBON R	R25J-10	1	415471004T
PCB1	R442	NF CARBON R	R25J-10	1	415471004T
PCB1	R451	CARBON R	R16J-3.3K	1	417343324T
PCB1	R452	CARBON R	R16J-3.3K	1	417343324T
PCB1	R453	CARBON R	R16J-220K	1	417342244T
PCB1	R454	CARBON R	R16J-220K	1	417342244T
PCB1	R455	CARBON R	R16J-22K	1	417342234T
PCB1	R456	CARBON R	R16J-22K	1	417342234T
PCB1	R457	CARBON R	R16J-3.3K	1	417343324T
PCB1	R458	CARBON R	R16J-3.3K	1	417343324T
PCB1	R459	CARBON R	R16J-4.7K	1	417344724T
PCB1	R460	CARBON R	R16J-4.7K	1	417344724T
PCB1	R461	CARBON R	R16J-100K	1	417341044T
PCB1	R462	CARBON R	R16J-100K	1	417341044T
PCB1	R463	CARBON R	R16J-220K	1	417342244T

PCB1	R464	CARBON R	R16J-220K	1	417342244T
PCB1	R491	CARBON R	R16J-47K	1	417344734T
PCB1	R492	CARBON R	R16J-47K	1	417344734T
PCB1	R493	CARBON R	R16J-270	1	417342714T
PCB1	R494	CARBON R	R16J-270	1	417342714T
PCB1	R495	CARBON R	R16J-100	1	417341014T
PCB1	R496	CARBON R	R16J-100	1	417341014T
PCB1	R501	CARBON R	R16J-470	1	417344714T
PCB1	R502	CARBON R	R16J-470	1	417344714T
PCB1	R503	CARBON R	R16J-27K	1	417342734T
PCB1	R504	CARBON R	R16J-27K	1	417342734T
PCB1	R505	CARBON R	R16J-10	1	417341004T
PCB1	R506	CARBON R	R16J-10	1	417341004T
PCB1	R507	CARBON R	R16J-47	1	417344704T
PCB1	R508	CARBON R	R16J-47	1	417344704T
PCB1	R509	CARBON R	R16J-47	1	417344704T
PCB1	R510	CARBON R	R16J-47	1	417344704T
PCB1	R511	CARBON R	R16J-5.6K	1	417345624T
PCB1	R512	CARBON R	R16J-5.6K	1	417345624T
PCB1	R513	CARBON R	R16J-56K	1	417345634T
PCB1	R514	CARBON R	R16J-56K	1	417345634T
PCB1	R515	CARBON R	R16J-1K	1	417341024T
PCB1	R516	CARBON R	R16J-1K	1	417341024T
PCB1	R517	CARBON R	R16J-1K	1	417341024T
PCB1	R518	CARBON R	R16J-1K	1	417341024T
PCB1	R519	CARBON R	R16J-1K	1	417341024T
PCB1	R520	CARBON R	R16J-1K	1	417341024T
PCB1	R521	METAL O R	RS1/2WBJ-82	1	443528204T
PCB1	R522	METAL O R	RS1/2WBJ-82	1	443528204T
PCB1	R523	METAL O R	RS1/2WBJ-82	1	443528204T
PCB1	R524	METAL O R	RS1/2WBJ-82	1	443528204T
PCB1	R525	METAL O R	RS1/2WBJ-68	1	443526804T
PCB1	R526	METAL O R	RS1/2WBJ-68	1	443526804T

PCB1	R527	METAL O R	RS1/2WBJ-82	1	443528204T
PCB1	R528	METAL O R	RS1/2WBJ-82	1	443528204T
PCB1	R529	METAL O R	RS1/2WBJ-47	1	443524704T
PCB1	R530	METAL O R	RS1/2WBJ-47	1	443524704T
PCB1	R531	CARBON R	R16J-18K	1	417341834T
PCB1	R532	CARBON R	R16J-18K	1	417341834T
PCB1	R533	CARBON R	R16J-56K	1	417345634T
PCB1	R534	CARBON R	R16J-56K	1	417345634T
PCB1	R535	CARBON R	R16J-18K	1	417341834T
PCB1	R536	CARBON R	R16J-18K	1	417341834T
PCB1	R539	METAL R	RNU1/2WCJ-2.2	1	453530224T
PCB1	R540	METAL R	RNU1/2WCJ-2.2	1	453530224T
PCB1	R541	METAL R	RNU1/2WCJ-2.2	1	453530224T
PCB1	R542	METAL R	RNU1/2WCJ-2.2	1	453530224T
PCB1	R543	METAL O R	RS1/2WBJ-220	1	443522214T
PCB1	R544	METAL O R	RS1/2WBJ-220	1	443522214T
PCB1	R545	CARBON R	R16J-22K	1	417342234T
PCB1	R546	CARBON R	R16J-22K	1	417342234T
PCB1	R547	METAL PR	MPR5W+5W 0R22	1	4000233
PCB1	R548	METAL PR	MPR5W+5W 0R22	1	4000233
PCB1	R549	CARBON R	R16J-2.7K	1	417342724T
PCB1	R550	CARBON R	R16J-2.7K	1	417342724T
PCB1	R551	CARBON R	R16J-33K	1	417343334T
PCB1	R552	CARBON R	R16J-33K	1	417343334T
PCB1	R553	CARBON R	R16J-47K	1	417344734T
PCB1	R554	CARBON R	R16J-47K	1	417344734T
PCB1	R555	METAL R	RNU1/2WCJ-8.2	1	453530824T
PCB1	R556	METAL R	RNU1/2WCJ-8.2	1	453530824T
PCB1	R557	NF CARBON R	R25J-2.2	1	415470224T
PCB1	R558	NF CARBON R	R25J-2.2	1	415470224T
PCB1	R561	CARBON R	R16J-270	1	417342714T
PCB1	R562	CARBON R	R16J-270	1	417342714T
PCB1	R563	CARBON R	R16J-100K	1	417341044T

PCB1	R564	CARBON R	R16J-100K	1	417341044T
PCB1	R565	CARBON R	R16J-120K	1	417341244T
PCB1	R566	CARBON R	R16J-120K	1	417341244T
PCB1	R567	CARBON R	R16J-22	1	417342204T
PCB1	R568	CARBON R	R16J-22	1	417342204T
PCB1	R569	CARBON R	R16J-22	1	417342204T
PCB1	R570	CARBON R	R16J-22	1	417342204T
PCB1	R571	CARBON R	R16J-33K	1	417343334T
PCB1	R572	CARBON R	R16J-22K	1	417342234T
PCB1	R573	CARBON R	R16J-10K	1	417341034T
PCB1	R574	CARBON R	R16J-47K	1	417344734T
PCB1	R575	CARBON R	R16J-220K	1	417342244T
PCB1	R577	CARBON R	R16J-120K	1	417341244T
PCB1	R578	CARBON R	R16J-120K	1	417341244T
PCB1	R579	CARBON R	R16J-330	1	417343314T
PCB1	R580	CARBON R	R16J-330	1	417343314T
PCB1	R581	CARBON R	R16J-5.6K	1	417345624T
PCB1	R582	CARBON R	R16J-5.6K	1	417345624T
PCB1	R583	CARBON R	R16J-3.9K	1	417343924T
PCB1	R584	CARBON R	R16J-3.9K	1	417343924T
PCB1	R585	CARBON R	R16J-470	1	417344714T
PCB1	R586	CARBON R	R16J-470	1	417344714T
PCB1	R587	TRIM R	N06HR2KBC	1	5210390T
PCB1	R588	TRIM R	N06HR2KBC	1	5210390T
PCB1	R589	CARBON R	R16J-3.3K	1	417343324T
PCB1	R590	CARBON R	R16J-3.3K	1	417343324T
PCB1	R593	METAL R	RNU1/2WCJ-2.2	1	453530224T
PCB1	R594	METAL R	RNU1/2WCJ-2.2	1	453530224T
PCB1	R595	METAL O R	RS1/2WBJ-10	1	443521004T
PCB1	R598	METAL O R	RS1WBJ-390	1	443623914T
PCB1	R599	METAL O R	RS1WBJ-390	1	443623914T
PCB1	R919	METAL R	RNU1/2WCJ-1	1	453530104T
PCB1	R921	METAL R	RNU1/2WCJ-0.47	1	453534794T

PCB1	R922	METAL R	RNU1/2WCJ-0.47	1	453534794T	
PCB1	R923	METAL R	RNU1/2WCJ-4.7	1	453530474T	
PCB1	R924	METAL O R	RS1/2WBJ-470	1	443524714T	
PCB1	R925	METAL O R	RS1/2WBJ-10	1	443521004T	
PCB1	R931	NF CARBON R	R25J-2.2K	1	415472224T	
PCB1	R932	CARBON R	R16J-330K	1	417343344T	
PCB1	R933	METAL O R	RS1/2WBJ-22	1	443522204T	
PCB1	R934	METAL O R	RS1/2WBJ-100	1	443521014T	
PCB1	R935	METAL O R	RS1/2WBJ-39	1	443523904T	
PCB1	R951	METAL R	RNU1/2WCJ-2.2	1	453530224T	
PCB1	R952	METAL R	RNU1/2WCJ-2.2	1	453530224T	
PCB1	R953	CARBON R	R16J-100K	1	417341044T	
PCB1	RL450	RELAY	NRL-2P2A-DC12-178	1	25065664	
PCB1	RL591	RELAY	NRL-2P5A-DC24-158	1	25065618	
PCB1	RL591 or	RELAY	NRL-2P5A-DC24-129	(1)	25065563A	
PCB1	RL591 or	RELAY	NRL-2P5A-DC24-193	(1)	25065703	
PCB1	RL592	RELAY	NRL-2P5A-DC24-158	1	25065618	
PCB1	RL592 or	RELAY	NRL-2P5A-DC24-129	(1)	25065563A	
PCB1	RL592 or	RELAY	NRL-2P5A-DC24-193	(1)	25065703	
PCB1	RL921	RELAY	NRL-1P10A-DC12-140	1	25065584	!
PCB1	RL922	RELAY	NRL-1P10A-DC12-140	1	25065584	!
PCB1	P301	PIN JACK	NPJ-6PDRW665	1	25045894	
PCB1	P301 or	PIN JACK	NPJ-6PDBL380	(1)	25045565	
PCB1	P302	PIN JACK	NPJ-6PDRW665	1	25045894	
PCB1	P302 or	PIN JACK	NPJ-6PDBL380	(1)	25045565	
PCB1	P303	PIN JACK	NPJ-6PDRW665	1	25045894	
PCB1	P303 or	PIN JACK	NPJ-6PDBL380	(1)	25045565	
PCB1	P371	JUMPER LEAD	JL11 200 B	1	---	NSP
PCB1	P371A	WIRE HOL	NSCT-11P882	1	25051095	
PCB1	P501	TRM	NTM-4PDMNRR420	1	25060492	
PCB1	P502	TRM	NTM-4PDMNRR420	1	25060492	
PCB1	P511	PLUG	NPLG-2P130	1	25055146	
PCB1	P512	PLUG	NPLG-2P130	1	25055146	

PCB1	P701B	PLUG	NPLG-7P0962	1	25056012	
PCB1	P702B	PLUG	NPLG-19P0974	1	25056024	
PCB1	P704B	TRM(SCREW)	NEJITANSI M3	1	25065425	
PCB1	P705B	TRM(SCREW)	NEJITANSI M3	1	25065425	
PCB1	P706	RETAINER	(JOINT)	1	27142069	
PCB1	P914A	CRIMP AS	CRIMP AS	1	2069925402UL	!
PCB1	P915A	CRIMP AS	CRIMP AS	1	2069925450UL	!
PCB1	P916A	CRIMP AS	CRIMP AS	1	2069925459UL	!
PCB1	P919	TRM	NTM-1P233(M1969)	1	25060302	
PCB1	E591	RETAINER	MET37-0002	1	27142009T	
PCB1	E592	RETAINER	MET37-0002	1	27142009T	
PCB1	F911A	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB1	F911B	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB1	F912A	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB1	F912B	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB1	F913A	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB1	F913B	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB1	JL401	JUMPER LEAD	JL9 100 B	1	---	NSP
PCB1	JL401A	WIRE TRAP	NPLG-9P592	1	25055630	
PCB1	JL401B	WIRE HOL	NSCT-9P880	1	25051093	
PCB1	JL711B	SOCKET	NSCT-3P95	1	25050267	
PCB1	JL716B	SOCKET	NSCT-3P95	1	25050267	
PCB1	JL913	JUMPER LEAD	JL5 600H	1	---	NSP
PCB1	JL913A	WIRE HOL	NSCT-5P896	1	25051109	
PCB1	JL913B	WIRE HOL	NSCT-5P896	1	25051109	
PCB1	JL915	JUMPER LEAD	JL3 450 H	1	---	NSP
PCB1	JL915A	WIRE HOL	NSCT-3P894	1	25051107	
PCB1	JL915B	WIRE HOL	NSCT-3P894	1	25051107	
PCB1	JL917	JUMPER LEAD	JL5 400 H	1	---	NSP
PCB1	JL917A	WIRE HOL	NSCT-5P896	1	25051109	
PCB1	JL917B	WIRE HOL	NSCT-5P896	1	25051109	
PCB1	JL918	JUMPER LEAD	JL5 100 H	1	---	NSP
PCB1	JL918A	SOCKET	NSCT-5P97	1	25050269	

PCB1	JL918B	WIRE HOL	NSCT-5P896	1	25051109	

PCB2	**U06**	MICROPROCESSOR PC BOARD (NADG-9619-1A)
PCB2	**U07**	DISPLAY PC BOARD (NADIS-9620-1A)
PCB2	**U08**	THERMAL SENSOR PC BOARD (NAETC-9621-1A)
PCB2	**U10**	POWER SUPPLY PC BOARD (NAPS-9623-1A)
PCB2	**U11**	TRANS. PRI. TERMINAL PC BOARD (NAETC-9624-1A)
PCB2	**U12**	INLET PC BOARD (NAETC-9625-1A)
PCB2	**U13**	VOLUME PC BOARD (NAETC-9626-1A)
PCB2	**U14**	VIDEO PC BOARD (NAVD-9627-1A)
PCB2	**U15**	HEADPHONE JACK PC BOARD (NAETC-9628-1A)

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB2	U851	REMO SENS	NJL34H380A	1	241365	
PCB2	Q251	IC	LA7956-E	1	22241759	
PCB2	Q252	IC	LA7956-E	1	22241759	
PCB2	Q253	TR	KTA1504-GR	1	2216185R2	
PCB2	Q253 or	TR	2SA1162-GR	(1)	2214375R2	
PCB2	Q254	TR	RN1404	1	2214490R2	
PCB2	Q255	TR	RN1404	1	2214490R2	
PCB2	Q256	TR	RN1404	1	2214490R2	
PCB2	Q257	TR	RN1441	1	2215410R2	
PCB2	Q258	TR	RN1441	1	2215410R2	
PCB2	Q259	TR	RN1441	1	2215410R2	
PCB2	Q701	IC (MAIN MICROPROCESSOR)	M3062LFGPFP U5(0270)	1	222W0048R302700	
PCB2	Q702	IC	S-812C56AUA-C3K	1	22242207R2	
PCB2	Q703	TR	KRC104S	1	2216210R2	
PCB2	Q703 or	TR	RN1404	(1)	2214490R2	
PCB2	Q704	TR	KRA102S	1	2216220R2	
PCB2	Q704 or	TR	RN2402	(1)	2214530R2	
PCB2	Q705	TR	KRA102S	1	2216220R2	
PCB2	Q705 or	TR	RN2402	(1)	2214530R2	
PCB2	Q706	TR	KRA102S	1	2216220R2	

PCB2	Q706 or	TR	RN2402	(1)	2214530R2
PCB2	Q707	TR	KRC104S	1	2216210R2
PCB2	Q707 or	TR	RN1404	(1)	2214490R2
PCB2	Q708	TR	KRC104S	1	2216210R2
PCB2	Q708 or	TR	RN1404	(1)	2214490R2
PCB2	Q851	IC	M66005-0001AHP	1	22242208R3
PCB2	Q852	FL TUBE	16-BT-128GNYK	1	212258A
PCB2	Q852A	HOLDER	(FL)	1	27191222C
PCB2	Q853	TR	KTC3875-GR	1	2216175R2
PCB2	Q853 or	TR	2SC2712-GR	(1)	2213145R2
PCB2	Q855	TR	KRC102S	1	2216190R2
PCB2	Q855 or	TR	RN1402	(1)	2214470R2
PCB2	Q856	IC	LM61CIZ	1	22242212
PCB2	Q856A	RETAINER	(PTH)	1	27141884-1
PCB2	Q912	TR	2SC2458-GR	1	2212115T
PCB2	Q912 or	TR	KTC3199-GR	(1)	2215864T
PCB2	Q912 or	TR	2SC1740S-R	(1)	2213284T
PCB2	D251	C-DIODE	KDS4148U	1	223283R2
PCB2	D251 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D251 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D252	C-DIODE	KDS4148U	1	223283R2
PCB2	D252 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D252 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D701	C-DIODE	KDS4148U	1	223283R2
PCB2	D701 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D701 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D702	C-DIODE	KDS4148U	1	223283R2
PCB2	D702 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D702 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D703	C-DIODE	KDS4148U	1	223283R2
PCB2	D703 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D703 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D704	C-DIODE	KDS4148U	1	223283R2

PCB2	D704 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D704 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D705	ZENER D	UDZS5.1B	1	224550510R2
PCB2	D705 or	ZENER D	MAZ8051-M	(1)	224750512R2
PCB2	D706	C-DIODE	KDS4148U	1	223283R2
PCB2	D706 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D706 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D707	C-DIODE	KDS4148U	1	223283R2
PCB2	D707 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D707 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D708	C-DIODE	KDS4148U	1	223283R2
PCB2	D708 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D708 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D710	DIODE	RL1N4003	1	22380260T
PCB2	D711	DIODE	RL1N4003	1	22380260T
PCB2	D712	DIODE	RL1N4003	1	22380260T
PCB2	D713	DIODE	RL1N4003	1	22380260T
PCB2	D851	ZENER D	UDZS8.2B	1	224550820R2
PCB2	D851 or	ZENER D	MAZ8082-M	(1)	224750822R2
PCB2	D852	LED	SLI-343URC-TE7	1	225449T
PCB2	D853	LED	SLR-342MGTE7P	1	225455T
PCB2	D855	SPCF D	SIR-34ST3F	1	225456
PCB2	D856	SPCF D	SIR-34ST3F	1	225456
PCB2	D901	C-DIODE	KDS4148U	1	223283R2
PCB2	D901 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D901 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D902	C-DIODE	KDS4148U	1	223283R2
PCB2	D902 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D902 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D903	C-DIODE	KDS4148U	1	223283R2
PCB2	D903 or	C-DIODE	1SS352	(1)	223234R2
PCB2	D903 or	C-DIODE	MA2J111	(1)	223279R2
PCB2	D904	C-DIODE	KDS4148U	1	223283R2

PCB2	D904 or	C-DIODE	1SS352	(1)	223234R2	
PCB2	D904 or	C-DIODE	MA2J111	(1)	223279R2	
PCB2	D905	C-DIODE	KDS4148U	1	223283R2	
PCB2	D905 or	C-DIODE	1SS352	(1)	223234R2	
PCB2	D905 or	C-DIODE	MA2J111	(1)	223279R2	
PCB2	D906	C-DIODE	KDS4148U	1	223283R2	
PCB2	D906 or	C-DIODE	1SS352	(1)	223234R2	
PCB2	D906 or	C-DIODE	MA2J111	(1)	223279R2	
PCB2	D908	C-DIODE	KDS4148U	1	223283R2	
PCB2	D908 or	C-DIODE	1SS352	(1)	223234R2	
PCB2	D908 or	C-DIODE	MA2J111	(1)	223279R2	
PCB2	D909	C-DIODE	KDS4148U	1	223283R2	
PCB2	D909 or	C-DIODE	1SS352	(1)	223234R2	
PCB2	D909 or	C-DIODE	MA2J111	(1)	223279R2	
PCB2	D912	C-DIODE	KDS4148U	1	223283R2	
PCB2	D912 or	C-DIODE	1SS352	(1)	223234R2	
PCB2	D912 or	C-DIODE	MA2J111	(1)	223279R2	
PCB2	D913	C-DIODE	KDS4148U	1	223283R2	
PCB2	D913 or	C-DIODE	1SS352	(1)	223234R2	
PCB2	D913 or	C-DIODE	MA2J111	(1)	223279R2	
PCB2	D914	ZENER D	UDZS5.1B	1	224550510R2	
PCB2	D914 or	ZENER D	MAZ8051-M	(1)	224750512R2	
PCB2	D991	C-DIODE	KDS4148U	1	223283R2	
PCB2	D991 or	C-DIODE	1SS352	(1)	223234R2	
PCB2	D991 or	C-DIODE	MA2J111	(1)	223279R2	
PCB2	D992	C-DIODE	KDS4148U	1	223283R2	
PCB2	D992 or	C-DIODE	1SS352	(1)	223234R2	
PCB2	D992 or	C-DIODE	MA2J111	(1)	223279R2	
PCB2	X701	CERA LOCK	CSTLS6M00G-56-A0	1	3010427T	
PCB2	X701 or	CERA LOCK	CR06000-TG-A0R	(1)	3010433T	
PCB2	T902	P TRANS	NPT-1520JQ	1	2301812A	!
PCB2	L701	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB2	L851	CHOKE COIL	LBC2518T470M	1	231364M470R2	

PCB2	L852	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
PCB2	L853	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
PCB2	L854	CHOKE COIL	LBC2518T220M	1	231364M220R2
PCB2	L855	CHOKE COIL	LBC2518T220M	1	231364M220R2
PCB2	L856	CHOKE COIL	LBC2518T220M	1	231364M220R2
PCB2	C251	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C252	VR C	CE04W16V-100M(VR)	1	394641017T
PCB2	C253	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C254	VR C	CE04W16V-100M(VR)	1	394641017T
PCB2	C255	VR C	CE04W16V-470M(VR)	1	394644717T
PCB2	C256	VR C	CE04W16V-470M(VR)	1	394644717T
PCB2	C257	VR C	CE04W16V-470M(VR)	1	394644717T
PCB2	C258	VR C	CE04W50V-2.2M(VR)	1	394680227T
PCB2	C259	VR C	CE04W50V-2.2M(VR)	1	394680227T
PCB2	C260	VR C	CE04W50V-2.2M(VR)	1	394680227T
PCB2	C261	VR C	CE04W50V-2.2M(VR)	1	394680227T
PCB2	C262	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C263	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C701	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C702	VR C	CE04W16V-100M(VR)	1	394641017T
PCB2	C703	VR C	CE04W16V-100M(VR)	1	394641017T
PCB2	C704	EDL C	DX-5R5L224	1	3000079T
PCB2	C705	VR C	CE04W16V-100M(VR)	1	394641017T
PCB2	C706	VR C	CE04W50V-10M(VR)	1	394681007T
PCB2	C707	VR C	CE04W50V-10M(VR)	1	394681007T
PCB2	C708	C-CERA C	CK725B1A-474K1	1	332134745R1
PCB2	C709	C-CERA C	CK725B1A-474K1	1	332134745R1
PCB2	C710	VR C	CE04W6.3V-470M(VR)	1	394624717T
PCB2	C711	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C712	VR C	CE04W50V-4.7M(VR)	1	394680477T
PCB2	C713	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C714	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C715	C-CERA C	CK725F1E-104Z1	1	332161040R1

PCB2	C716	C-CERA C	CC725CH1H-101J1	1	342101014R1
PCB2	C717	C-CERA C	CC725CH1H-101J1	1	342101014R1
PCB2	C718	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C719	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C720	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C721	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C722	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C723	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C724	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C725	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C726	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C727	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB2	C728	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C729	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C730	C-CERA C	CC725CH1H-101J1	1	342101014R1
PCB2	C731	VR C	CE04W50V-2.2M(VR)	1	394680227T
PCB2	C732	VR C	CE04W16V-100M(VR)	1	394641017T
PCB2	C733	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C734	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C735	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C737	VR C	CE04W16V-470M(VR)	1	394644717T
PCB2	C853	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C854	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C855	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C856	VR C	CE04W16V-100M(VR)	1	394641017T
PCB2	C857	C-CERA C	CC725CH1H-101J1	1	342101014R1
PCB2	C858	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB2	C859	C-CERA C	CC725CH1H-101J1	1	342101014R1
PCB2	C860	C-CERA C	CC725CH1H-101J1	1	342101014R1
PCB2	C861	C-CERA C	CC725CH1H-101J1	1	342101014R1
PCB2	C863	VR C	CE04W50V-47M(VR)	1	394684707T
PCB2	C864	VR C	CE04W16V-100M(VR)	1	394641017T
PCB2	C865	C-CERA C	CK725B1H-223K1	1	332102235R1

PCB2	C866	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB2	C867	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB2	C868	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB2	C869	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB2	C870	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB2	C871	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB2	C872	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB2	C873	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB2	C874	TF C	ECQ-B50V-102J	1	374721024T	
PCB2	C875	TF C	ECQ-B50V-102J	1	374721024T	
PCB2	C902	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB2	C903	VR C	CE04W35V-2200M(VR)	1	394662227S	
PCB2	C904	VR C	CE04W35V-100M(VR)	1	394661017T	
PCB2	C906	VR C	CE04W50V-4.7M(VR)	1	394680477T	
PCB2	C912	IS C	LE103-C3.5	1	3800042S	!
PCB2	C912 or	IS C	ECQU2A103MLC	(1)	3800039S	!
PCB2	C991	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB2	R251	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB2	R252	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB2	R253	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB2	R254	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB2	R255	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB2	R256	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB2	R257	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB2	R258	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB2	R259	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB2	R260	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB2	R261	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB2	R262	C-CARBON R	RN72K1J-684JE	1	435036844R1	
PCB2	R263	C-CARBON R	RN72K1J-684JE	1	435036844R1	
PCB2	R264	C-CARBON R	RN72K1J-684JE	1	435036844R1	
PCB2	R265	C-CARBON R	RN72K1J-684JE	1	435036844R1	
PCB2	R266	C-CARBON R	RN72K1J-104JE	1	435031044R1	

PCB2	R267	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB2	R268	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB2	R701	C-CARBON R	RN72K1J-102JE	1	435031024R1
PCB2	R702	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R703	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R704	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R705	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R706	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB2	R707	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB2	R709	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R710	C-CARBON R	RN72K1J-105JE	1	435031054R1
PCB2	R711	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R712	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB2	R714	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R715	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R716	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R717	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R718	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R721	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R722	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R723	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R724	C-CARBON R	RN72K1J-223JE	1	435032234R1
PCB2	R725	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB2	R726	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R727	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R728	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R729	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R730	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R731	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R732	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R733	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R734	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R735	C-CARBON R	RN72K1J-221JE	1	435032214R1

PCB2	R736	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB2	R737	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB2	R738	C-CARBON R	RN72K1J-222JE	1	435032224R1
PCB2	R739	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R740	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R741	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB2	R742	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB2	R743	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB2	R744	C-CARBON R	RN72K1J-222JE	1	435032224R1
PCB2	R745	C-CARBON R	RN72K1J-222JE	1	435032224R1
PCB2	R746	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R747	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R748	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R749	C-CARBON R	RN72K1J-102JE	1	435031024R1
PCB2	R751	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R752	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R753	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R754	C-CARBON R	RN72K1J-000JE	1	435030004R1
PCB2	R755	C-CARBON R	RN72K1J-000JE	1	435030004R1
PCB2	R756	C-CARBON R	RN72K1J-000JE	1	435030004R1
PCB2	R757	C-CARBON R	RN72K1J-000JE	1	435030004R1
PCB2	R762	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R763	C-CARBON R	RN72K1J-224JE	1	435032244R1
PCB2	R764	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R765	C-CARBON R	RN72K1J-102JE	1	435031024R1
PCB2	R766	C-CARBON R	RN72K1J-102JE	1	435031024R1
PCB2	R767	C-CARBON R	RN72K1J-273JE	1	435032734R1
PCB2	R768	C-CARBON R	RN72K1J-273JE	1	435032734R1
PCB2	R769	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R770	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R771	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R772	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R774	C-CARBON R	RN72K1J-470JE	1	435034704R1

PCB2	R775	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R776	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R777	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R778	C-CARBON R	RN72K1J-470JE	1	435034704R1
PCB2	R779	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB2	R780	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB2	R781	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB2	R782	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB2	R783	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB2	R784	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB2	R785	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB2	R786	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB2	R787	C-CARBON R	RN72K1J-272JE	1	435032724R1
PCB2	R788	C-CARBON R	RN72K1J-272JE	1	435032724R1
PCB2	R789	C-CARBON R	RN72K1J-272JE	1	435032724R1
PCB2	R790	C-CARBON R	RN72K1J-272JE	1	435032724R1
PCB2	R791	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R792	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB2	R793	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R794	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R795	METAL O R	RS1/2WBJ-10	1	443521004T
PCB2	R796	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R797	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R798	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R799	C-CARBON R	RN72K1J-473JE	1	435034734R1
PCB2	R800	METAL O R	RS1WBJ-220	1	443622214T
PCB2	R801	C-CARBON R	RN72K1J-105JE	1	435031054R1
PCB2	R802	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R803	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB2	R804	METAL O R	RS1/2WBJ-82	1	443528204T
PCB2	R851	C-CARBON R	RN72K1J-273JE	1	435032734R1
PCB2	R852	C-CARBON R	RN72K1J-332JE	1	435033324R1
PCB2	R853	C-CARBON R	RN72K1J-332JE	1	435033324R1

PCB2	R854	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB2	R855	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB2	R856	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB2	R857	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB2	R858	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB2	R859	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB2	R860	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB2	R861	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB2	R862	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB2	R863	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB2	R864	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB2	R865	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB2	R866	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB2	R867	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB2	R868	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB2	R869	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB2	R870	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB2	R871	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB2	R872	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB2	R873	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB2	R874	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB2	R875	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB2	R876	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB2	R877	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB2	R878	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB2	R879	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB2	R880	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB2	R881	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB2	R882	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB2	R883	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB2	R884	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB2	R885	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB2	R886	C-CARBON R	RN72K1J-392JE	1	435033924R1	

PCB2	R887	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB2	R888	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB2	R889	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB2	R890	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB2	R891	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB2	R892	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB2	R893	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB2	R894	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB2	R896	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB2	R897	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB2	R898	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB2	R899	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB2	R909	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB2	R913	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB2	R914	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB2	R915	METAL O R	RS1/2WBJ-220	1	443522214T	
PCB2	RL902	RELAY	NRL-1P5A-DC9-179	1	25065669	!
PCB2	S851	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S852	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S853	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S854	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S855	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S856	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S857	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S858	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S859	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S860	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S861	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S862	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S863	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S864	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S865	PUSH SW	NPS-111-S681	1	25035718T	
PCB2	S866	PUSH SW	NPS-111-S681	1	25035718T	

PCB2	S867	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S868	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S869	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S870	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S871	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S872	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S873	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S874	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S875	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S876	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S877	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S878	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S879	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S880	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S881	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S882	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S883	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S884	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S885	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S886	PUSH SW	NPS-111-S681	1	25035718T
PCB2	S887	R ENCODE	EVEHD1F3024B	1	25065695W
PCB2	P211B	PLUG	NPLG-15P667	1	25055711
PCB2	P251A	SOCKET	NSCT-9P1024	1	25051234
PCB2	P251B	PLUG	NPLG-9P661	1	25055705
PCB2	P252	PIN JACK	NPJ-3PDYE208	1	25045363
PCB2	P253	PIN JACK	NPJ-3PDYE208	1	25045363
PCB2	P254	PIN JACK	NPJ-1PDY655	1	25045882
PCB2	P503	JACK	YKB26-5138	1	25045257
PCB2	P701A	SOCKET	NSCT-7P2187	1	25052290
PCB2	P702A	SOCKET	NSCT-19P2199	1	25052302
PCB2	P704A	SOCKET	NSCT-13P2106	1	25052209
PCB2	P705	SOCKET	NSCT-9P2427	1	25052530
PCB2	P707	ST JACK	MSJ-035-22	1	25045887

PCB2	P707 or	JACK	YKB21-5130	(1)	25045387	
PCB2	P708	TRM(SCREW)	NEJITANSI M3	1	25065425	
PCB2	P715A	SOCKET	NSCT-27P2120	1	25052223	
PCB2	P715B	SOCKET	NSCT-27P2157	1	25052260	
PCB2	P811B	PLUG	NPLG-19P764	1	25055808	
PCB2	P902	AC INLET	NPLG-2P913	1	25055960	!
PCB2	P910	SOCKET	NSCT-2P1358	1	25051571	!
PCB2	P911	CRIMP AS	CRIMP AS	1	2069943351UL	!
PCB2	P912	CRIMP AS	CRIMP AS	1	2069943459UL	!
PCB2	P921	CRIMP AS	CRIMP AS	1	206CC45150UL	!
PCB2	P922	CRIMP AS	CRIMP AS	1	206CC45159UL	!
PCB2	P991	RETAINER	MET37-0002	1	27142009T	
PCB2	F901A	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB2	F901B	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB2	F903A	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB2	F903B	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB2	JL703	JUMPER LEAD	JL3 300 H	1	---	NSP
PCB2	JL703A	WIRE HOL	NSCT-3P894	1	25051107	
PCB2	JL703B	SOCKET	NSCT-3P95	1	25050267	
PCB2	JL711	JUMPER LEAD	JL3 350 H	1	---	NSP
PCB2	JL711A	WIRE HOL	NSCT-3P894	1	25051107	
PCB2	JL716	JUMPER LEAD	JL3 150 H	1	---	NSP
PCB2	JL716A	WIRE HOL	NSCT-3P894	1	25051107	
PCB2	JL851	JUMPER LEAD	JL3 100 H	1	---	NSP
PCB2	JL851A	WIRE HOL	NSCT-3P894	1	25051107	
PCB2	JL851B	SOCKET	NSCT-3P108	1	25050280	
PCB2	JL911	JMP LEAD	JL7 500 B	1	---	NSP
PCB2	JL911A	WIRE HOL	NSCT-7P878	1	25051091	
PCB2	JL911B	WIRE TRAP	NPLG-7P590	1	25055628	

PCB3 **U16** ZONE 2/ XM PC BOARD (NAAR-9631-1A)

PCB3

PCB3	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS

PCB3	Q201	IC	BU9450KV-E2	1	22242505R2
PCB3	Q202	IC	AK4388ET-E2	1	22242519R2
PCB3	Q203	IC	NJM4580M-D	1	22241448R2
PCB3	Q204	IC	TA48033AF(TE16L_NQ)	1	22278033DR2TO
PCB3	Q204 or	IC	BA33BC0FP	(1)	22278033DR2RH
PCB3	Q204 or	IC	NJM2391DL1-33	(1)	22278033DR2JR
PCB3	Q204 or	IC	TA48033BF(TE16L_NQ)	(1)	22278033DBR2TO
PCB3	Q205	IC	78L05(NJM78L05UA)	1	222780053R2JR
PCB3	Q206	IC	TC74HCT7007AF(EL_F)	1	222740077R2TO
PCB3	Q207	IC	TC74VHC541FT(EKJ)	1	22274541E1R2TO
PCB3	Q207 or	IC	SN74AHC541PWR	(1)	22274541IR2TI
PCB3	Q208	TR	2SA1930(ONK_Q)	1	2203000
PCB3	Q208A	HEAT SINK	RAD-083	1	27160271
PCB3	Q208B	SCREW	3P+10FN(3BC)	1	82143010GR
PCB3	Q209	IC	S-812C53AUA-C3HT2G	1	22242270R2
PCB3	Q802	IC	ICL3221ECVZ	1	22242268R2
PCB3	Q803	TR	2SB1240-R	1	2213794T
PCB3	Q804	TR	2SB1240-R	1	2213794T
PCB3	Q805	TR	2SB1240-R	1	2213794T
PCB3	Q806	TR	KRC102S	1	2216190R2
PCB3	Q806 or	TR	RN1402	(1)	2214470R2
PCB3	Q807	TR	KRC102S	1	2216190R2
PCB3	Q807 or	TR	RN1402	(1)	2214470R2
PCB3	Q808	TR	KRC102S	1	2216190R2
PCB3	Q808 or	TR	RN1402	(1)	2214470R2
PCB3	Q809	TR	KTA1504-GR	1	2216185R2
PCB3	Q809 or	TR	2SA1162-GR	(1)	2214375R2
PCB3	Q810	PHT CP	TLP421(BL_J)	1	24120103
PCB3	Q810 or	PHT CP	PC817X	(1)	24120080
PCB3	Q811	PHT CP	TLP421(BL_J)	1	24120103
PCB3	Q811 or	PHT CP	PC817X	(1)	24120080
PCB3	Q831	TR	RN1441	1	2215410R2
PCB3	Q832	TR	RN1441	1	2215410R2

PCB3	Q833	TR	RN1441	1	2215410R2
PCB3	Q834	TR	RN1441	1	2215410R2
PCB3	Q835	IC	NJM4580M-D	1	22241448R2
PCB3	Q836	TR	RN1441	1	2215410R2
PCB3	Q837	TR	RN1441	1	2215410R2
PCB3	D201	DIODE	RL1N4003	1	22380260T
PCB3	D202	DIODE	RL1N4003	1	22380260T
PCB3	D801	C-DIODE	KDS4148U	1	223283R2
PCB3	D801 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D801 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D802	C-DIODE	KDS4148U	1	223283R2
PCB3	D802 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D802 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D803	C-DIODE	KDS4148U	1	223283R2
PCB3	D803 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D803 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D804	C-DIODE	KDS4148U	1	223283R2
PCB3	D804 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D804 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D805	C-DIODE	KDS4148U	1	223283R2
PCB3	D805 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D805 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D806	C-DIODE	KDS4148U	1	223283R2
PCB3	D806 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D806 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	X201	CRYSTAL	DSX530GA 45.1584MHz	1	3010418R2
PCB3	L201	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
PCB3	L202	EMIFIL	BK1608LM182-T	1	230958R1
PCB3	L203	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
PCB3	L204	CHOKE COIL	BLM21PG221SN1	1	230949R2
PCB3	L205	CHOKE COIL	BLM21PG221SN1	1	230949R2
PCB3	L206	CHOKE COIL	BLM21PG221SN1	1	230949R2
PCB3	L801	CHOKE COIL	LBC2518T2R2M	1	231364M022R2

PCB3	C201	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C202	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB3	C203	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C204	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C205	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C206	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C207	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
PCB3	C208	C-CERA C	CC725CH1H-040C1	1	342100401R1
PCB3	C209	C-CERA C	CC725CH1H-080D1	1	342100802R1
PCB3	C210	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C211	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C212	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C213	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C214	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB3	C215	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C216	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB3	C217	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C218	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
PCB3	C219	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C221	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB3	C222	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB3	C223	C-CERA C	CC725CH1H-471J1	1	342104714R1
PCB3	C224	C-CERA C	CC725CH1H-471J1	1	342104714R1
PCB3	C225	C-CERA C	CC725CH1H-471J1	1	342104714R1
PCB3	C226	C-CERA C	CC725CH1H-471J1	1	342104714R1
PCB3	C227	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB3	C228	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB3	C229	VR C	CE04W16V-220M(VR)	1	394642217T
PCB3	C230	VR C	CE04W16V-220M(VR)	1	394642217T
PCB3	C231	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C232	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
PCB3	C233	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB3	C234	UTSP C	CE04W10V-100M(UTSP)	1	397531017T

PCB3	C235	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C237	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB3	C238	C-CERA C	CK725B1H-102K1	1	332101025R1
PCB3	C239	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C240	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C241	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
PCB3	C242	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
PCB3	C803	UTSP C	CE04W25V-100M(UTSP)	1	397551017T
PCB3	C804	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C805	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
PCB3	C806	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
PCB3	C807	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
PCB3	C808	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
PCB3	C809	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB3	C810	UTSP C	CE04W25V-100M(UTSP)	1	397551017T
PCB3	C831	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB3	C832	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
PCB3	C833	TF C	ECQ-B50V-102J	1	374721024T
PCB3	C834	TF C	ECQ-B50V-102J	1	374721024T
PCB3	C837	TF C	ECQ-B50V-103J	1	374721034T
PCB3	C838	TF C	ECQ-B50V-103J	1	374721034T
PCB3	C839	TF C	ECQ-B50V-471J	1	374724714T
PCB3	C840	TF C	ECQ-B50V-471J	1	374724714T
PCB3	C841	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T
PCB3	C842	TF C	ECQ-B50V-102J	1	374721024T
PCB3	C843	VR C	CE04W16V-220M(VR)	1	394642217T
PCB3	C844	VR C	CE04W16V-220M(VR)	1	394642217T
PCB3	R201	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB3	R202	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB3	R203	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R204	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R205	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R206	C-CARBON R	RN72K1J-221JE	1	435032214R1

PCB3	R207	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R208	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB3	R209	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R210	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R211	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB3	R212	C-CARBON R	RN72K1J-102JE	1	435031024R1
PCB3	R213	C-CARBON R	RN72K1J-102JE	1	435031024R1
PCB3	R214	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R215	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R216	C-CARBON R	RN72K1J-681JE	1	435036814R1
PCB3	R217	C-CARBON R	RN72K1J-105JE	1	435031054R1
PCB3	R218	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB3	R220	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R221	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R222	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R223	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R224	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R225	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R227	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R228	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R229	C-CARBON R	RN72K1J-332JE	1	435033324R1
PCB3	R230	C-CARBON R	RN72K1J-332JE	1	435033324R1
PCB3	R231	C-CARBON R	RN72K1J-332JE	1	435033324R1
PCB3	R232	C-CARBON R	RN72K1J-332JE	1	435033324R1
PCB3	R233	C-CARBON R	RN72K1J-332JE	1	435033324R1
PCB3	R234	C-CARBON R	RN72K1J-332JE	1	435033324R1
PCB3	R235	C-CARBON R	RN72K1J-392JE	1	435033924R1
PCB3	R236	C-CARBON R	RN72K1J-392JE	1	435033924R1
PCB3	R237	METAL O R	RS1/2WBJ-22	1	443522204T
PCB3	R238	METAL O R	RS1/2WBJ-22	1	443522204T
PCB3	R239	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R240	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R241	C-CARBON R	RN72K1J-220JE	1	435032204R1

PCB3	R242	C-CARBON R	RN72K1J-220JE	1	435032204R1
PCB3	R243	C-CARBON R	RN72K1J-220JE	1	435032204R1
PCB3	R244	C-CARBON R	RN72K1J-220JE	1	435032204R1
PCB3	R245	C-CARBON R	RN72K1J-330JE	1	435033304R1
PCB3	R246	NF CARBON R	R25J-0.22	1	415472294T
PCB3	R247	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R248	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R249	C-CARBON R	RN72K1J-221JE	1	435032214R1
PCB3	R802	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R803	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R804	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB3	R805	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB3	R806	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB3	R807	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R808	C-CARBON R	RN72K1J-331JE	1	435033314R1
PCB3	R809	METAL O R	RS1WBJ-100	1	443621014T
PCB3	R810	METAL O R	RS1WBJ-100	1	443621014T
PCB3	R811	C-CARBON R	RN72K1J-022JE	1	435030224R1
PCB3	R812	C-CARBON R	RN72K1J-018JE	1	435030184R1
PCB3	R813	C-CARBON R	RN72K1J-102JE	1	435031024R1
PCB3	R814	C-CARBON R	RN72K1J-022JE	1	435030224R1
PCB3	R815	C-CARBON R	RN72K1J-018JE	1	435030184R1
PCB3	R816	C-CARBON R	RN72K1J-102JE	1	435031024R1
PCB3	R817	C-CARBON R	RN72K1J-022JE	1	435030224R1
PCB3	R818	C-CARBON R	RN72K1J-018JE	1	435030184R1
PCB3	R819	C-CARBON R	RN72K1J-102JE	1	435031024R1
PCB3	R820	C-CARBON R	RN72K1J-224JE	1	435032244R1
PCB3	R821	C-CARBON R	RN72K1J-224JE	1	435032244R1
PCB3	R822	C-CARBON R	RN72K1J-224JE	1	435032244R1
PCB3	R823	METAL O R	RS1WBJ-100	1	443621014T
PCB3	R824	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R825	C-CARBON R	RN72K1J-103JE	1	435031034R1
PCB3	R826	C-CARBON R	RN72K1J-102JE	1	435031024R1

PCB3	R831	C-CARBON R	RN72K1J-224JE	1	435032244R1
PCB3	R832	C-CARBON R	RN72K1J-224JE	1	435032244R1
PCB3	R833	C-CARBON R	RN72K1J-271JE	1	435032714R1
PCB3	R834	C-CARBON R	RN72K1J-271JE	1	435032714R1
PCB3	R835	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R836	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R837	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R838	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R839	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R840	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R841	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R842	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R843	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R844	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB3	R845	C-CARBON R	RN72K1J-104JE	1	435031044R1
PCB3	R846	C-CARBON R	RN72K1J-271JE	1	435032714R1
PCB3	R847	C-CARBON R	RN72K1J-101JE	1	435031014R1
PCB3	R848	C-CARBON R	RN72K1J-224JE	1	435032244R1
PCB3	R849	C-CARBON R	RN72K1J-224JE	1	435032244R1
PCB3	R850	C-CARBON R	RN72K1J-224JE	1	435032244R1
PCB3	R852	C-CARBON R	RN72K1J-000JE	1	435030004R1
PCB3	R853	C-CARBON R	RN72K1J-000JE	1	435030004R1
PCB3	R858	C-CARBON R	RN72K1J-472JE	1	435034724R1
PCB3	P201	SOCKET	CAM-C16	1	25053104R2
PCB3	P202	SOCKET	YKF51-5397N	1	25053201
PCB3	P211A	SOCKET	NSCT-15P1030	1	25051240
PCB3	P371B	WIRE TRAP	NPLG-11P594	1	25055632
PCB3	P801	SOCKET	7906-09FHA	1	25053103
PCB3	P802	ST JACK	HSJ1002-01-6020	1	25045647
PCB3	P803	ST JACK	HSJ1002-01-6020	1	25045647
PCB3	P804	ST JACK	HSJ1002-01-6020	1	25045647
PCB3	P805	TRM(SCREW)	NEJITANSI M3	1	25065425
PCB3	P811A	SOCKET	NSCT-19P1317	1	25051530

PCB3	P831	PIN JACK	NPJ-4PDRW592	1	25045812	
PCB3	P831 or	PIN JACK	NPJ-4PDBL308	(1)	25045491	
PCB3	P832	PIN JACK	NPJ-1PDP526	1	25045738	
PCB3	E201	RETAINER	(XM)	1	27142048	

DTM-5.9

PACKING PROCEDURE PARTS LIST

	REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PV	A601	PAD	L & R 1set	1	29092047B	
PV	A602	POLY BAG	w850 x d650	1	29100245	
PV	A603	POLY BAG	w250 x d350	1	29100250	
PV	A605	TAPE	NITTO NO.29 yellow	(1)	29110149	
PV	A606	PP TAPE	W50 SBT-70	(1)	29110200	
PV	A701	CARTON	MD	1	29054853	
PV	A702	UPC LABEL	DTM59	1	29390510A	
PV	A801	INS MANUAL	En(DTM-5.9)	1	29344831	
PV	A802	INST SHEET	En(XM RADIO)	1	29355602	
PV	A803	WRNTY CARD	(INTEGRA)	1	29365103	
PV	A804	HANDBILL	(SIRIUS)	1	29380149	
PV	A805	HANDBILL	(DS-A2X)US	1	29380150	
PV	A821	REMO CON	RC-676M	1	24140676	
PV	A822	BATTERY	R6/AA(UM-3)	2	3010194	
PV	A822	BATTERY	R6/AA(UM-3)	(2)	3010054	
PV	A823	ANT COIL	NMA-3057	1	232140	
PV	A824	FM ANT AS	Type W	1	292191	
PV	P901	AC CORD	AS-UC-2	1	253352ATES	!
PV	P901 or	AC CORD	AS-UC-2	(1)	253297KAW	!
PV	P901 or	AC CORD	AS-UC-2	(1)	253371VOL	!

Integra Division of
ONKYO CORPORATION
Sales & Product Planning Div. : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
Tel: 072-831-8023 Fax: 072-831-8163 http://www.onkyo.com/

Integra Division of
ONKYO U.S.A. CORPORATION
18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 201-785-2600 Fax: 201-785-2650 http://www.integrahometheater.com